

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT

MAINTENANCE REPAIR PARTS AND

SPECIAL TOOLS LIST

FOR

TELEPHONE SET

TA-838/TT (NSN 5805-00-124-8676)

AND

TA-838A/TT (NSN 5805-01-125-5976)

Change

No. 1

**Direct Support and General Support Maintenance
Repair Parts and Special Tools List**

For

TELEPHONE SET

TA-838/TT (NSN 5805-00-124-8678) (EIC: HJR)

AND

TA-838A/TT (NSN 5805-01-125-5976) (EIC: HOR)

TM 11-75805-650-34P, 12 September 1985, is changed as follows:

1. Remove old pages and insert new pages as indicated below. New or changed material in Sections II and IV is indicated by an asterisk adjacent to the item number in the item no. column. New or changed material is indicated by a vertical bar in the margin of the page. Added or revised illustrations are indicated by a vertical bar adjacent to the illustration identification number..

Remove pages	Insert pages
i/(ii blank)	i/(ii blank)
1-1 and 1-2	1-1 and 1-2
None	Figure 3A
I-1 and I-2	I-1 and I-2
I-3 and I-4	I-3 and I-4

2. File this change sheet in front of the manual for reference purposes.


Distribution authorized to US Government agencies and their contractors for official use or for administrative or operational purposes only. This determination was made on 1 April 1994. Other requests for this document will be referred to Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5007.

DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:


MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army
06733

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36-E, block 4370 requirements for TM 11-5805-650-34P.

TECHNICAL MANUAL

No. 11-5805-650-34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 12 September 1985

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE

REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

TELEPHONE SET

TA-838/TT (NSN 5805-00-124-8678) (EIC: HJR)

AND

TA-838A/TT (NSN 5805-01-125-5976) (EIC: HOR)

Current as of 30 September 1993

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes, or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms) or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5007.

In either case a reply will be furnished direct to you.

Table of Contents

		Page	IllUs. Figure
SECTION I.	Introduction	1	
	II. Repair Parts List	1-1	
GROUP 00	Telephone Set TA-838 and TA-838A/TT	1-1	1
01	Circuit Card Assembly TA-838/TT, SM-D-790711	2-1	2
	Circuit Card Assembly TA-838A/TT, SM-D-986348	3-1	3
	Circuit Card Assembly TA-838/TT and TA-838A/TT A3188334 (No Parts Authorized)		3A
02	Handset Assembly	4-1	4
03	Shell Assembly	5-1	5
SECTION III.	Special Tools List (Not applicable)		
IV.	National Stock Number and Part Number Index	I-1	

SECTION I

INTRODUCTION

1. Scope

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of direct support and general support maintenance of the TA-838/TT and TA/838A/TT. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numeric sequence, with the parts in each group listed in ascending item number sequence. Figure numbers are listed directly beneath the group header.


b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbered items appearing in the listing, followed by a list in alphameric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns (Section II and III)

a. Item No. (Column 1). Indicates the number used to identify items called out in the illustration.

b. SMR Code (Column 2). The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

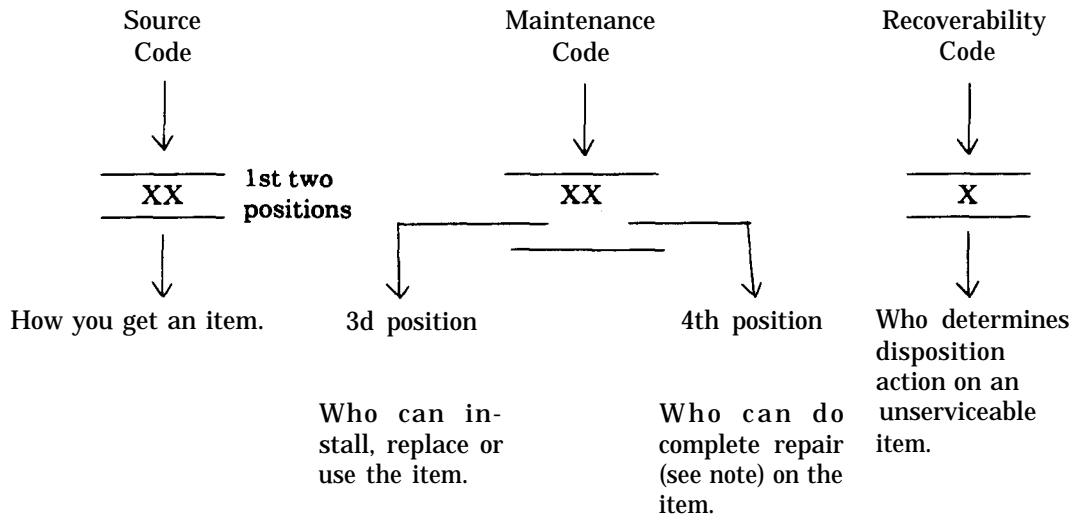

NOTE

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) *Source code.* The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

<i>Code</i>	<i>Explanation</i>
PA PB PC PD PE PF PG	Stocked items; use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code. <p style="text-align: center;">NOTE Items coded PC are subject to deterioration.</p>
KD KF KB	Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kits must be requisitioned and applied.
MO- Made at org/ AVUM category MF- Made at DS/ AVUM category MH- Made at GS category ML- Made at Specialized Repair Activity (SRA) MD- Made at Depot	Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.
AO- Assembled by org/ AVUM category AF- Assembled by DS/ AVIM category AH- Assembled by GS category AL- Assembled by SRA AD- Assembled by Depot	Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the disposition code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.
<i>Code</i>	<i>Explanation</i>
XA-	Do not requisition an "XA" coded item. Order its next higher assembly.
XB-	If an "XB" item is not available from salvage, order it using the FSCM and part number given.
XC-	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturers part number.
XD-	Item is not stocked. Order an "XD" coded item through normal supply channels using the FSCM and part number given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR 750-1.

(2) *Maintenance code.* Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows

(a) The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance.

<i>Code</i>	<i>Application/Explanation</i>
C-	Crew or operator maintenance done within organizational or aviation maintenance.
O-	Organizational or aviation unit category can remove, replace, and use the item.
F-	Direct support or aviation intermediate category can remove, replace, and use the item.
H-	General support category can remove, replace, and use the item.
L-	Specialized repair activity can remove, replace, and use the item.
D-	Depot category can remove, replace, and use the item.

(b) The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes.

NOTE

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

<i>Code</i>	<i>Application/Explanation</i>
O-	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F-	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H-	General support is the lowest category that can do complete repair of the item.
L-	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D-	Depot is the lowest category that can do complete repair of the item.
Z-	Nonreparable. No repair is authorized.
B-	No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item). However, the item may be reconditioned by adjusting, lubricating, etc., at the user category.

(3) *Recoverability code.* Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows

<i>Recoverability codes</i>	<i>Application/Explanation</i>
Z-	Nonreparable Item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR Code.
O-	Reparable item. When uneconomically repairable, condemn and dispose of the item at organizational or aviation unit category.
F—	Reparable item. When uneconomically repairable, condemn and dispose of the item at direct support or aviation intermediate category.
H-	Reparable item. When uneconomically repairable, condemn and dispose of the item at general support category.
D-	Reparable item. When beyond lower category repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.
L-	Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA).
A-	Item requires special handling or condemnation procedures because of specific reasons (e.g., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. *FSCM (Column(3))*. The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d. *Part Number (Column (4))*. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use a NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e. *Description and Usable on Code (UOC) (Column (5))*. This column includes the following information.

(1) The Federal item name and, when required, a minimum description to identify the item.

(2) Usable on code, when applicable (para 5).

(3) The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both section II and section III.

f. *Qty (Column 6)*. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

4. Explanation of columns (Section IV)

a. *National Stock Number (NSN) Index*.

(1) *Stock number column*. This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).

(2) *Fig. column*. This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in sections II and III.

(3) *Item column*. The item number identifies the item associated with the figure listed in the adjacent Fig. column. This item is also identified by the NSN listed on the same line.

b. *Part Number Index*. Part numbers in this index are listed by part number in ascending alphameric sequence.

(1) *FSCM column*. This column lists the Federal supply code for manufacturer (FSCM).

(2) *Part number column*. This column indicates the part number assigned to the item.

(3) *Stock number column*. This column lists the National stock number for the associated part number and manufacturer identified in the part number and FSCM columns to the left.

(4) *Fig. column*. This column lists the number of the figure where the item is identified/located in sections II and III.

(5) *Item column*. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

5. Special Information

a. *Usable on Code*. The usable on code appears in the lower left corner of the description column heading. Usable on codes are shown as "UOC: " in the description column (justified left) on the first line applicable item description nomenclature. Uncoded items are applicable to all models. Identification of the usable on codes used in this RPSTL are:

<i>Code</i>	<i>Used on</i>
CFS	TA-838/TT
EUG	TA-838A/TT

b. *Associated Publications*. The publications listed below pertain to the TA-838/TT and TA-838A/TT and their components:

TM 11-5805-650-12, Telephone Set TA-838/TT

TM 11-5805-650-34, Telephone Set TA-838/TT

TM 11-5805-650-20P, Telephone Set TA-838A/TT

c. *National Stock Numbers*. National stock numbers (NSN'S) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN'S are established and published, submit exception requisitions to

Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-MM, Fort Monmouth, NJ 07703-5006 for the part required to support your equipment.

6. How to Locate Repair Parts

a When National stock number or part number is not known.

(1) *First.* Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

(2) *Second* Find the figure covering the assembly group or subassembly group to which the item belongs.

(3) *Third* Identify the item on the figure and note the item number.

(4) *Fourth.* Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.

(5) *Fifth.* Refer to the Part Number Index to find the NSN, if assigned.


b. When National stock number or part number is known.

(1) *First.* Using the index of National stock numbers and part numbers, find the pertinent National stock number or part number. The NSN index is in National item identification number (NIIN) sequence (para 4a)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4b). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) *Second.* After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.


7. Abbreviations

Not applicable.

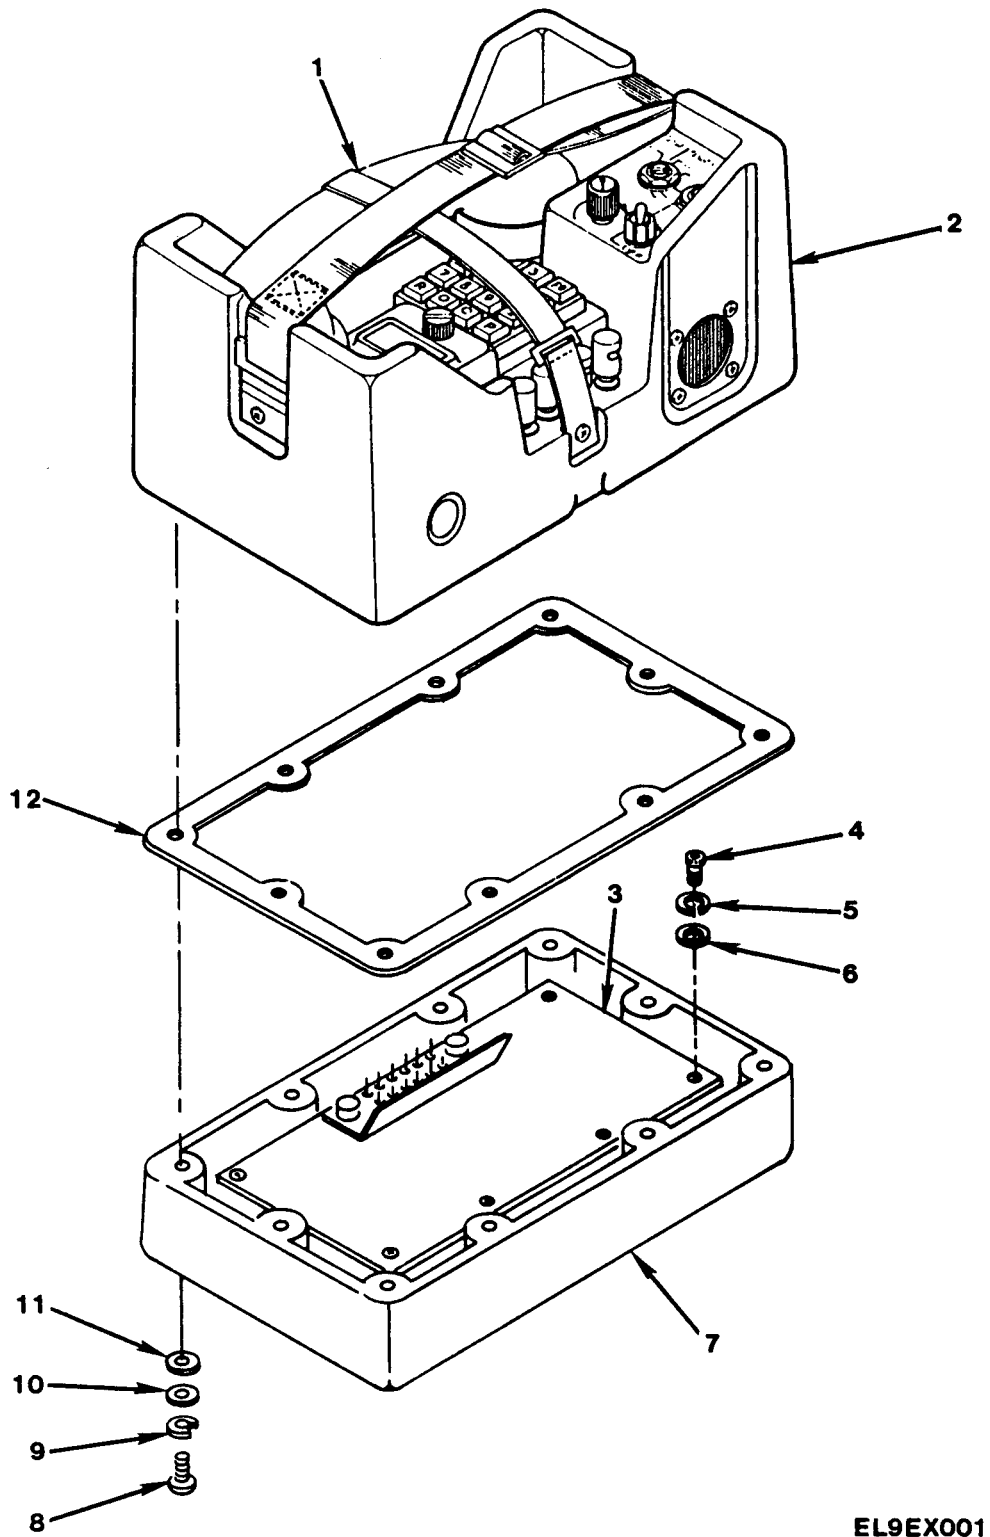


EL9EX001

Figure 1. Telephone Set TA-838/TT & TA-838A/TT (sheet 1 of 4)

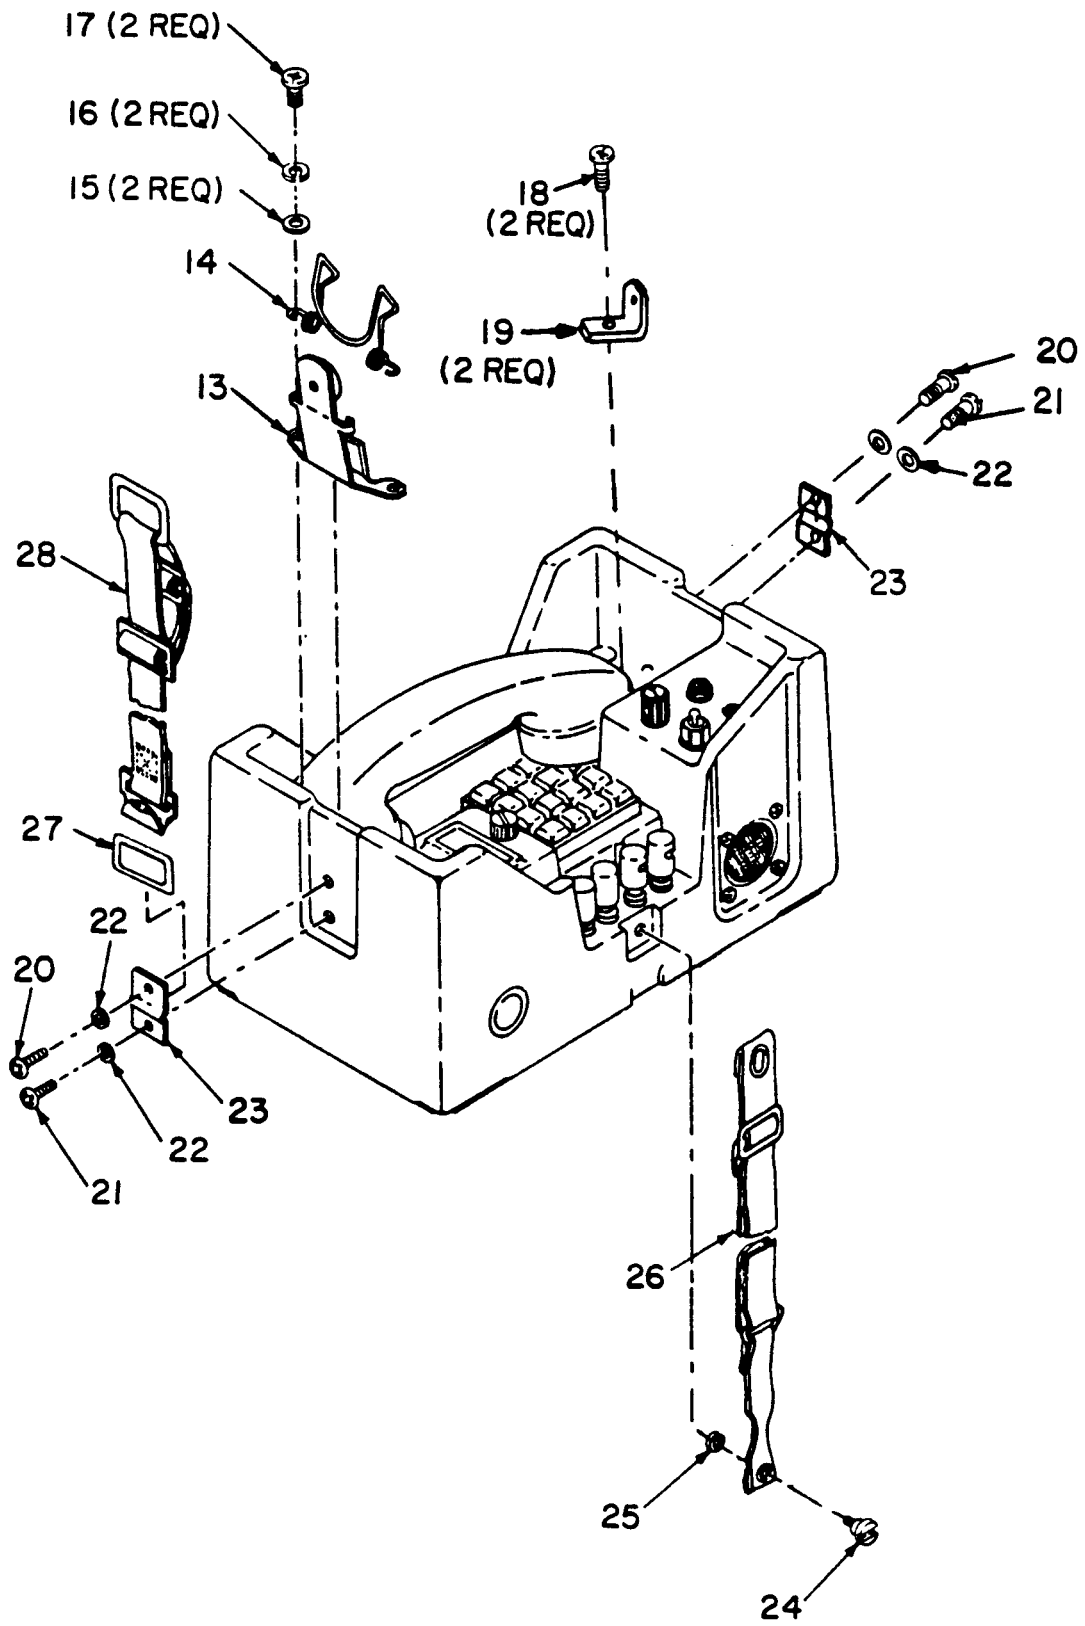


EL9EX002

Figure 1. Telephone Set TA-838/TT & TA-838A/TT (sheet 2 of 4)

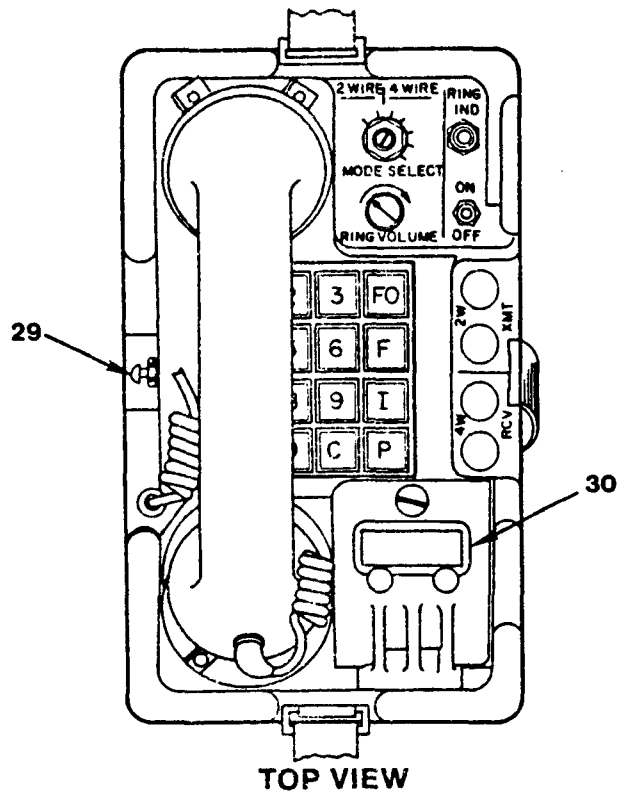

TOP VIEW


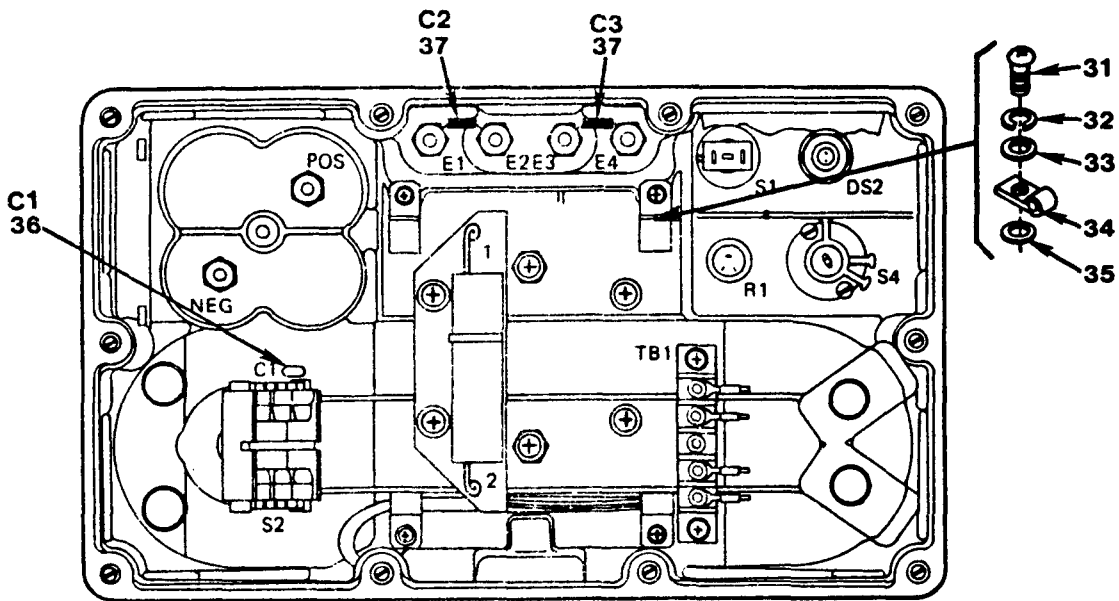


BOTTOM VIEW

(BASE PLATE AND PRINTED CIRCUIT CARD REMOVED)

EL9EX003

Figure 1. Telephone Set TA-838/TT & TT-838A/TT (sheet 3 of 4)

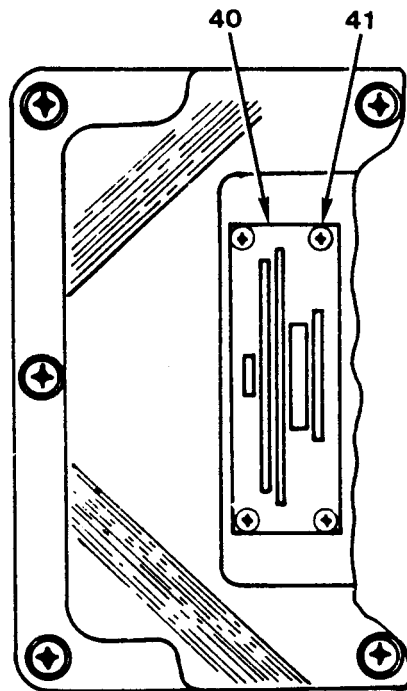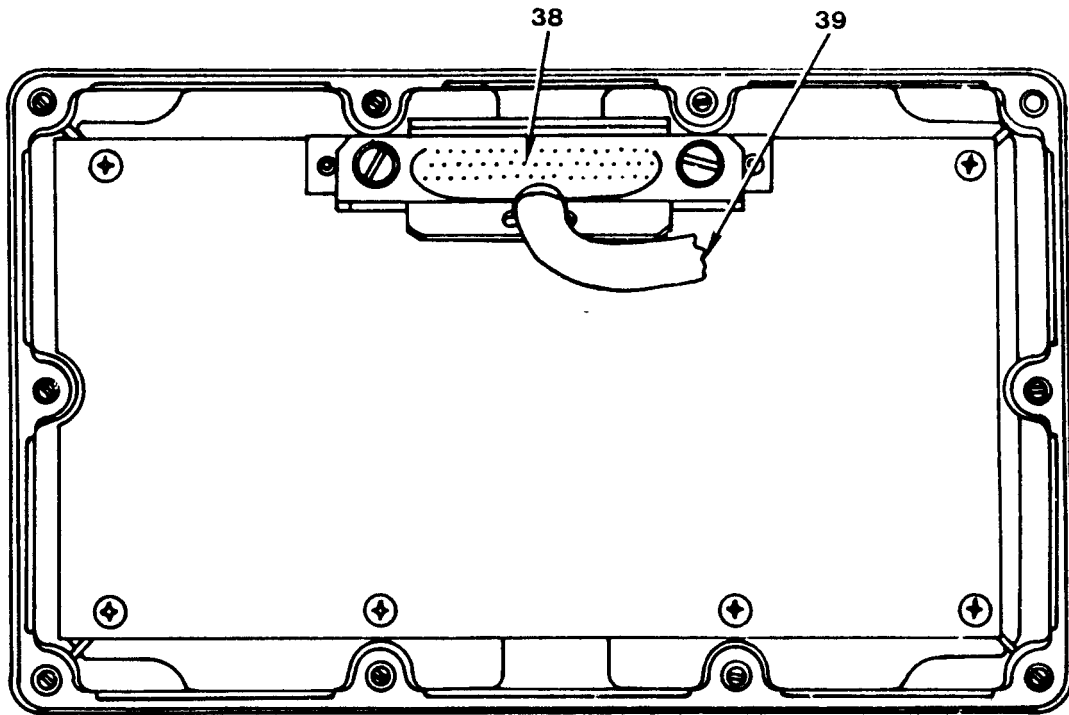

EL9EX004

Figure 1. Telephone Set TA-838/TT & TA-838A/TT (sheet 4 of 4)


(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
GROUP 00 TELEPHONE SET					
TA-838/TT & TA-838A/TT					
FIG.1					
1	PAFFF	80063	SM-D-790665	HANDSET	1
2	XBFZZ	80063	SM-D-790672	SHELL, TEL BASE	1
3	PAFLL	80063	SM-D-790711	CIRCUIT CARD ASSEMB	1
UOC:CFS					
3	PAFLL	80063	SM-D-986348	CIRCUIT CARD ASSEMB	1
UOC:EUG					
* 3	PAFZZ	80063	A3188334	CIRCUIT CARD ASSEMB	1
4	PAFZZ	96906	MS51959-28	SCREW, MACHINE	6
UOC:CFS					
5	PAFZZ	80063	SM-B-416109-1	WASHER, FLAT	6
UOC:CFS					
6	PAFZZ	96906	MS35338-136	WASHER, LOCK	6
UOC:CFS					
7	XAFZZ	80063	SM-D-790673	BASE, TELEPHONE	1
8	PAFZZ	80063	SM-B-790720	SCREW, EXTERNALLY RE	10
9	PAFZZ	96906	MS15795-807	WASHER, FLAT	10
10	PAFZZ	96906	MS35338-137	WASHER, LOCK	10
11	PAFZZ	96906	MS9068-006	PACKING, PREFORMED	10
12	PAFZZ	80063	SM-C-790674	GASKET	1
13	PAOZZ	80063	SM-B-790810	BRACKET	1
14	PAOZZ	80063	SM-C-790713	SPRING, HELICAL, TORS	1
15	PAOZZ	96906	MS15795-805	WASHER, FLAT	2
16	PAOZZ	96906	MS35338-136	WASHER, LOCK	2
17	PAOZZ	96906	MS51959-28	SCREW, MACHINE	2
18	PAFZZ	96906	MS24693C26	SCREW, MACHINE	2
19	XBFZZ	80063	SM-B-790807	BRACKET, DOUBLE	2
20	PAOZZ	96906	MS51957-42	SCREW, MACHINE	2
21	PAOZZ	96906	MS51957-44	SCREW, MACHINE	1
22	PAOZZ	96906	MS15795-807	WASHER, FLAT	2
23	PAOZZ	80063	SM-B-790688	RETAINER LOOP 1	1
24	PAOZZ	80063	SM-B-790719	SCREW, SHOULDER	1
25	PAOZZ	96906	MS35338-135	WASHER, LOCK	1
26	PAOZZ	80063	SM-C-790718	STRAP, TIEDOWN, ELECT	1
27	PAFZZ	80063	SM-B-790703	LOOP, STRAP FASTENER	1
28	PAOZZ	80063	SM-C-790702	STRAP, WEBBING	1
29	PAFZZ	96906	MS27978-6B	STUD, SNAP FASTENER	1
30	PAFZZ	80063	SM-B-790690	PLATE, MARKING, BLANK	1
31	PAFZZ	96906	MS51957-15	SCREW, MACHINE	4
32	PAFZZ	96906	MS35338-135	WASHER, LOCK	4
33	PAFZZ	96906	MS15795-806	WASHER, FLAT	4
34	PAHZZ	80063	SM-B-751281-2	CLAMP, LOOP	4
35	PAFZZ	96906	MS15795-804	WASHER, FLAT	4
36	PAFZZ	81349	CMR06F511G0DR	CAPACITOR, FIXED, MIC	1
37	PAHZZ	81349	CQ09A1MC102K3	CAPACITOR FIXED	2
UOC:EUG					
38	PAHZZ	80063	SM-C-790736	CONNECTOR, PLUG, ELEC	1
39	XBHZZ	80063	SM-D-790753	WIRING HARNESS	1

SECTION II

TM11-5805-650-34P

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
40	XBFZZ	80063	SM-C-79037	PLATE, IDENT	1
41	PAFZZ	73734	23021	SCREW, MACHINE	4

END OF FIGURE

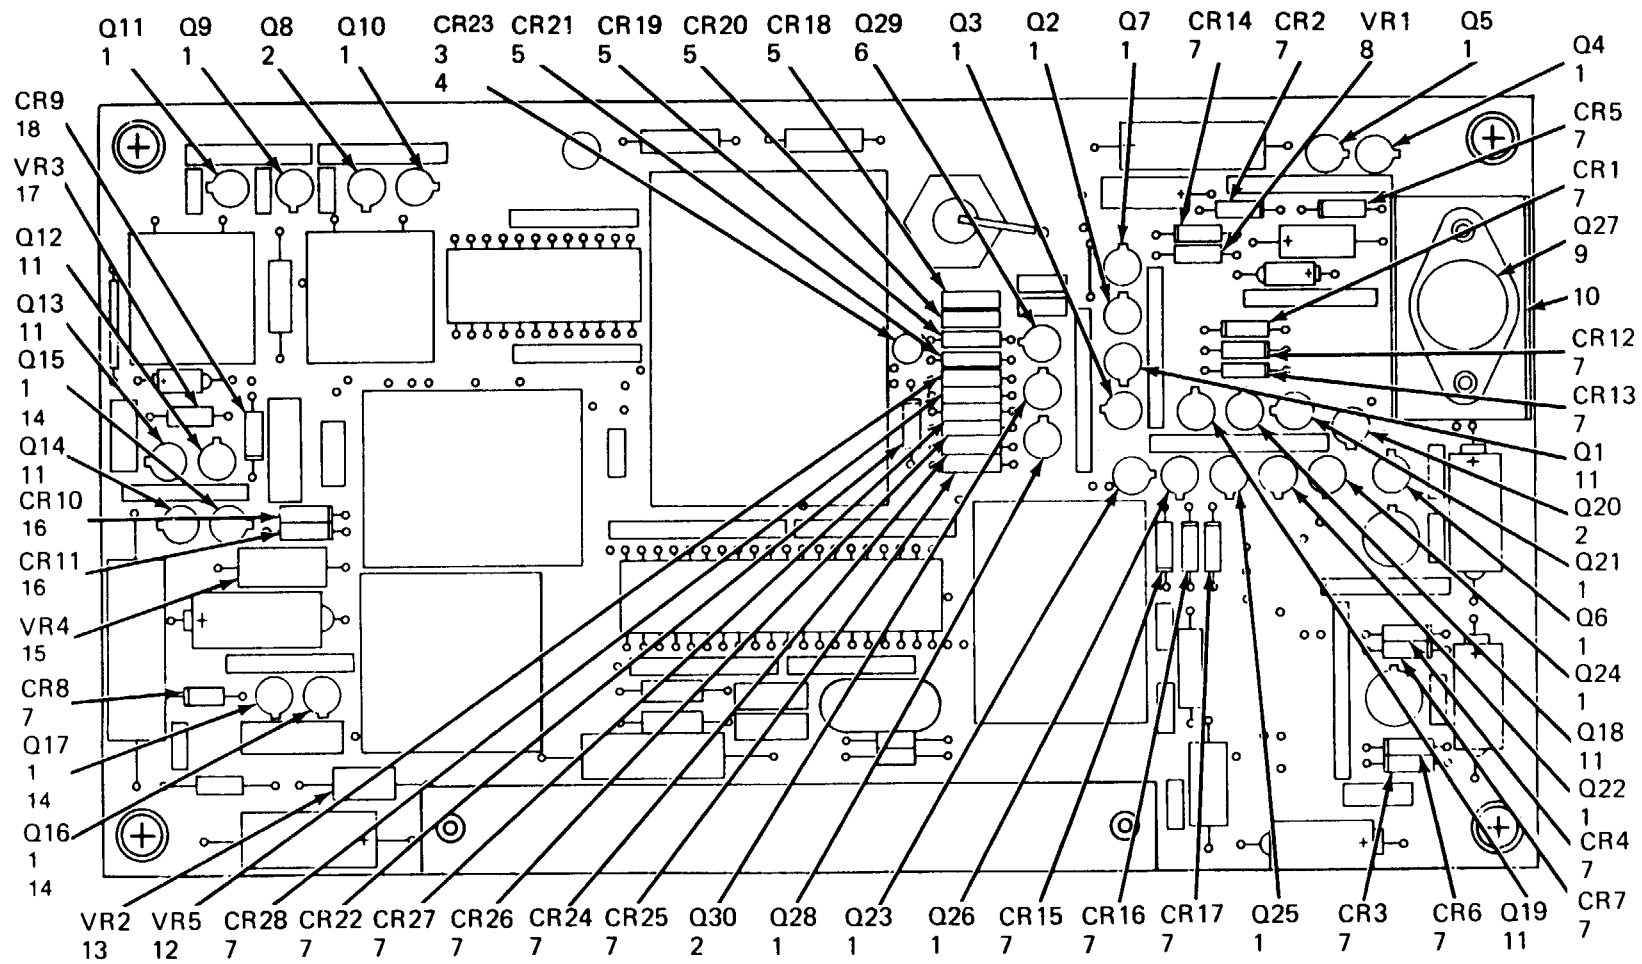

EL9EX005

Figure 2. Circuit Card Assembly TA-838/TT (sheet 1 of 2)

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
GROUP 01 CIRCUIT CARD ASSEMBLY TA-838/TT					
FIG.2					
1	PAHZZ	81349	JAN2N2222A	TRANSISTOR UOC:CFS	19
2	PAHZZ	81349	JAN2N2484	TRANSISTOR UOC:CFS	3
3	PAHZZ	80063	SM-A-790803	SEMICONDUCTOR DEVIC UOC:CFS	1
4	PAHZZ	07047	10216-DAP	MOUNTING PAD,ELECTR UOC:CFS	1
5	PAHZZ	80063	SM-A-790768	SEMICONDUCTOR DEVIC UOC:CFS	4
6	PAHZZ	80063	SM-A-790766	TRANSISTOR UOC:CFS	1
7	PAHZZ	81349	JAN1N4148-1	SEMICONDUCTOR DEVIC UOC:CFS	20
8	PAHZZ	80063	SM-A-790746	SEMICONDUCTOR DEVIC UOC:CFS	1
9	PAHZZ	80063	SM-A-790767	TRANSISTOR UOC:CFS	1
10	XBHZZ	80063	SM-B-790801	HEAT SINK UOC:CFS	1
11	PAHZZ	81349	JAN2N2907A	TRANSISTOR UOC:CFS	6
12	PAHZZ	80063	SM-A-790763	SEMICONDUCTOR,DEVIC UOC:CFS	1
13	PAHZZ	81349	JAN1N3018B	SEMICONDUCTOR DEVIC UOC:CFS	1
14	PAHZZ	81349	M38527/1-01D	MOUNTING PAD,ELECTR UOC:CFS	20
15	PAHZZ	81349	JAN1N3033B	SEMICONDUCTOR DEVIC UOC:CFS	1
16	PAHZZ	81349	JAN1N3600	SEMICONDUCTOR DEVIC UOC:CFS	2
17	XBHZZ	80063	SM-A-790745	SEMICONDUCTOR DEVIC UOC:CFS	1
18	PAHZZ	81349	JAN1N5288	SEMICONDUCTOR DEVIC UOC:CFS	1
19	PAHZZ	96906	MS75101-3	COIL,RADIO FREQUENC UOC:CFS	1
20	PAHZZ	81349	M39014/02-1350	CAPACITOR, FIXED,CER UOC:CFS	8
21	PAHZZ	80063	SM-A-790712-3	RESISTOR NETWORK,FI UOC:CFS	1
22	PAHZZ	81349	M39014/02-1347	CAPACITOR, FIXED,CER UOC:CFS	1
23	PAHZZ	80063	SM-A-790716-6	MICROCIRCUIT DIGITA UOC:CFS	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
24	PAHZZ	81349	CMR07F103F0DR	CAPACITOR, FIXED, MIC UOC: CFS	2
25	PAHZZ	80063	SM-A-790715	MICROCIRCUIT, DIGITA UOC: CFS	1
26	PAHZZ	80063	SM-A-790712-13	RESISTOR NETWORK, FI UOC: CFS	2
27	PAHZZ	81349	RJ50CP203	RESISTOR, VARIABLE, N UOC: CFS	1
28	PAHZZ	81349	RNR60K1052FM	RESISTOR, FIXED, FILM UOC: CFS	1
29	PAHZZ	80063	SM-A-790712-1	RESISTOR NETWORK, FI UOC: CFS	1
30	PAHZZ	81349	RLR05C1001GS	RESISTOR, FIXED, FILM UOC: CFS	1
31	XBHZZ	80063	SM-B-790797	WASHER, FLAT UOC: CFS	5
32	PAHZZ	80063	SM-D-790744	AMPLIFIER, AUDIO FRE UOC: CFS	1
33	PAHZZ	80063	SM-A-790712-2	RESISTOR NETWORK, FI UOC: CFS	1
34	PAHZZ	81349	JAN1N3330B	SEMICONDUCTOR DEVIC UOC: CFS	1
35	PAHZZ	96906	MS15795-810	WASHER, FLAT UOC: CFS	2
36	PAHZZ	81349	RNC55K1623FS	RESISTOR, FIXED, FILM UOC: CFS	2
37	PAHZZ	81349	M39003-01-0287	CAPACITOR FIXED ELE UOC: CFS	1
38	PAHZZ	81349	M39006/22-0631	CAPACITOR, FIXED, ELE UOC: CFS	1
39	PAHZZ	80063	SM-A-790712-16	RESISTOR NETWORK, FI UOC: CFS	1
40	PAHZZ	80063	SM-A-790712-14	RESISTOR NETWORK, FI UOC: CFS	1
41	PAHZZ	80063	SM-A-790712-5	RESISTOR NETWORK, FI UOC: CFS	1
42	PAHZZ	81349	M39003-01-3185	CAPACITOR, FIXED, ELE UOC: CFS	1
43	PAHZZ	81349	M39003-01-2357	CAPACITOR, FIXED, ELE UOC: CFS	2
44	PAHZZ	80063	SM-A-790712-7	RESISTOR NETWORK, FI UOC: CFS	1
45	PAHZZ	80063	SM-C-790726	TRANSFORMER, AUDIO F UOC: CFS	1
46	PAHZZ	80063	SM-A-790712-8	RESISTOR NETWORK, FI UOC: CFS	1
47	PAHZZ	81349	CMR05F101G0DR	CAPACITOTR, FIXED, MIC UOC: CFS	2
48	PAHZZ	80063	SM-A-790739	MICROCIRCUIT, LINEAR UOC: CFS	2
49	PAHZZ	80063	SM-A-790712-4	RESISTOR NETWORK, FI UOC: CFS	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
50	PAHZZ	81349	M39003-01-2313	CAPACITOR, FIXED, ELE UOC: CFS	1
51	PAHZZ	80063	SM-A-790712-9	RESISTOR NETWORK, FI UOC: CFS	1
52	PAHZZ	81349	M39003-01-3132	CAPACITOR, FIXED, ELE UOC: CFS	1
53	PAHZZ	81349	CMR05F201G0DR	CAPACITOR, FIXED, MIC UOC: CFS	1
54	PAHZZ	81349	RCR07G220JS	RESISTOR, FIXED, COMP UOC: CFS	1
55	PAHZZ	81349	M39003/01-3015	CAPACITOR, FIXED, ELE UOC: CFS	1
56	PAHZZ	96906	MS75101-12	COIL, RADIO FREQUENC UOC: CFS	1
57	PAHZZ	81349	M39014/02-1360	CAPACITOR, FIXED, CER UOC: CFS	1
58	PAHZZ	80063	SM-A-790716	MICROCIRCUIT, DIGITA UOC: CFS	1
59	PAHZZ	80063	SM-A-790714	CRYSTAL UNIT, QUARTZ UOC: CFS	1
60	XBHZZ	80063	SM-C-790776	TERMINAL STUD UOC: CFS	3
61	PAHZZ	81349	RLR05C6201GS	RESISTOR, FIXED, FILM UOC: CFS	1
62	PAHZZ	81349	RCR07G565JS	RESISTOR, FIXED, COMP UOC: CFS	1
63	PAHZZ	80063	SM-A-790712-11	RESISTOR NETWORK, FI UOC: CFS	1
64	PAHZZ	81349	CMR05E820G0DR	CAPACITOR, FIXED, MIC UOC: CFS	1
65	PAHZZ	81349	CMR05E220J0DR	CAPACITOR, FIXED, MIC UOC: CFS	1
66	PAHZZ	81349	RLR20C103JM	RESISTOR, FIXED, FILM UOC: CFS	1
67	PAHZZ	81349	RLR20C102GM	RESISTOR, FIXED, FILM UOC: CFS	1
68	PAHZZ	81349	RWR71S6811FS	RESISTOR, FIXED, WIRE UOC: CFS	1
69	PAHZZ	80063	SM-A-790712-10	RESISTOR NETWORK, FI UOC: CFS	1
70	PBHZZ	80063	SM-C-790734	CONNECTOR, RECEPTACL UOC: CFS	1
71	XBHZZ	80063	SM-B-790761	SHIM UOC: CFS	2
72	PAHZZ	96906	MS16535-157	RIVET, TUBULAR UOC: CFS	2
73	PAHZZ	81349	M39006/22-0517	CAPACITOR, FIXED, ELE UOC: CFS	1
74	PAHZZ	80063	SM-C-790728	INDUCTOR, SINGLE FRE UOC: CFS	1
75	PAHZZ	81349	RCR07G3R3JS	RESISTOR, FIXED, COMP UOC: CFS	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
76	PAHZZ	81349	CMR06F102G0DR	CAPACITOR, FIXED, MIC UOC: CFS	2
77	PAHZZ	80063	SM-A-790712-15	RESISTOR NETWORK, FI UOC: CFS	1
78	PAHZZ	81349	M39003/01-2991	CAPACITOR, FIXED, ELE UOC: CFS	1
79	PAHZZ	81349	M39022-01-1669	CAPACITOR, FIXED, MET UOC: CFS	1
80	PAHZZ	80063	SM-A-790712-12	RESISTOR NETWORK, FI UOC: CFS	1
81	PAHZZ	80063	SM-B-751245	MOUNTING PAD, ELECTR UOC: CFS	56
82	PAHZZ	81349	CMR05F111G0DR	CAPACITOR, FIXED, MIC UOC: CFS	1
83	PAHZZ	80063	SM-C-790727	TRANSFORMER, AUDIO F UOC: CFS	1

END OF FIGURE

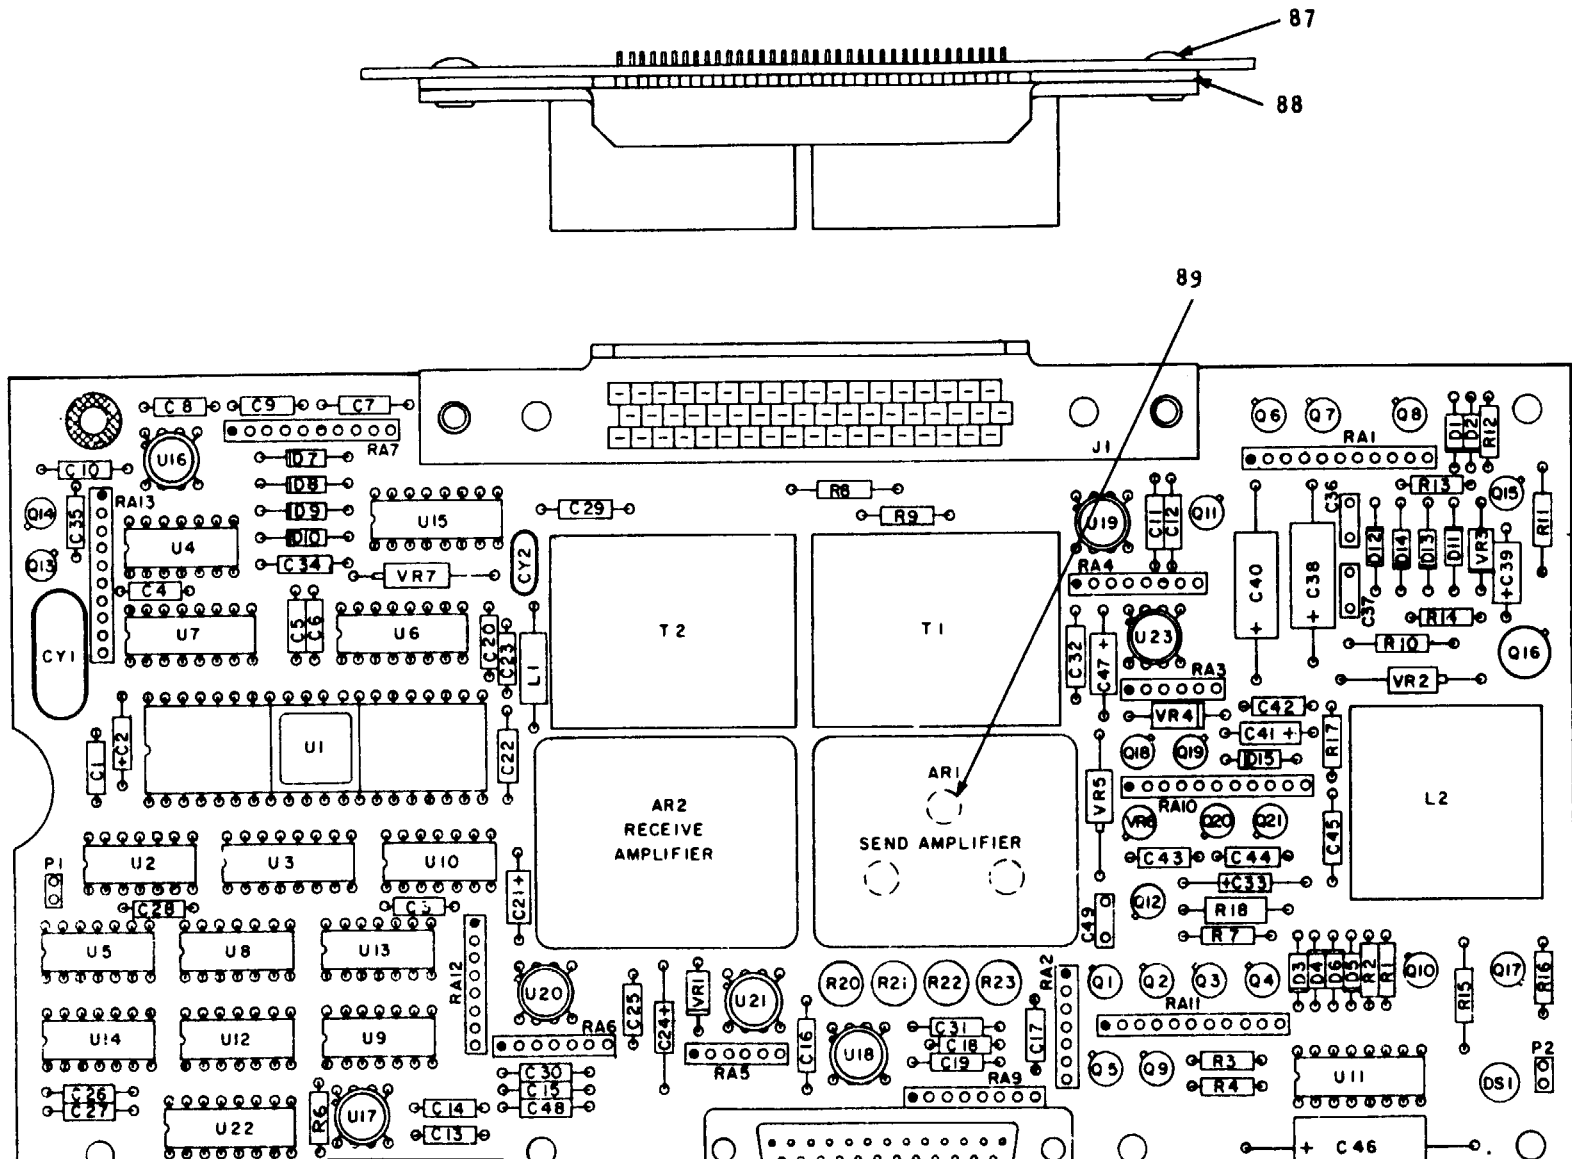



Figure 3. Circuit Card Assembly TA-838A/TT (sheet 1 of 2)

LEGEND

<u>Ref</u> <u>Des</u>	<u>Item</u> <u>No.</u>	<u>Ref</u> <u>Des</u>	<u>Item</u> <u>No.</u>	<u>Ref</u> <u>Des</u>	<u>Item</u> <u>No.</u>	<u>Ref</u> <u>Des</u>	<u>Item</u> <u>No.</u>
AR1	1	C40	18	Q8	33	RA6	55
AR2	2	C41	4	Q9	33	RA7	56
C1	3	C42	19	Q10	33	RA8	57
C2	4	C43	13	Q11	33	RA9	58
C3	5	C44	19	Q12	33	RA10	59
C4	6	C45	8	Q13	32	RA11	60
C5	6	C46	20	Q14	33	RA12	61
C6	7	C47	11	Q15	33	RA13	62
C7	8	C48	8	Q16	34	T1	63
C8	9	C49	21	Q17	32	T2	64
C9	5	CY1	22	Q18	32	U1	65
C10	8	CY2	23	Q19	32	U2	66
C11	8	D1	24	Q20	33	U3	67
C12	8	D2	24	Q21	33	U4	68
C13	5	D3	24	R1	35	U5	69
C14	5	D4	24	R2	35	U6	70
C15	8	D5	24	R3	36	U7	71
C16	8	D6	24	R4	37	U8	72
C17	10	D7	25	R5	38	U9	73
C18	10	D8	25	R6	37	U10	69
C19	8	D9	25	R7	39	U11	74
C20	10	D10	25	R8	40	U12	75
C21	11	D11	25	R9	41	U13	69
C22	8	D12	25	R10	42	U14	75
C23	12	D13	25	R11	40	U15	76
C24	11	D14	25	R12	43	U16	77
C25	13	D15	24	R13	44	U17	77
C26	14	DS1	26	R14	43	U18	77
C27	14	J1	26	R15	45	U19	77
C28	12	J2	28	R16	44	U20	78
C29	8	L1	29	R17	46	U21	79
C30	8	L2	30	R18	47	U22	80
C31	8	P1	31	R20	48	U23	79
C32	8	P2	31	R21	48	VR1	81
C33	11	Q1	32	R22	48	VR2	82
C34	15	Q2	33	R23	49	VR3	83
C35	13	Q3	32	RA1	50	VR4	84
C36	16	Q4	33	RA2	51	VR5	82
C37	16	Q5	33	RA3	52	VR6	85
C38	17	Q6	32	RA4	53	VR7	86
C39	4	Q7	33	RA5	54		

EL9EX008

Figure 3. Circuit Card Assembly TA-838A/TT (sheet 2 of 2)

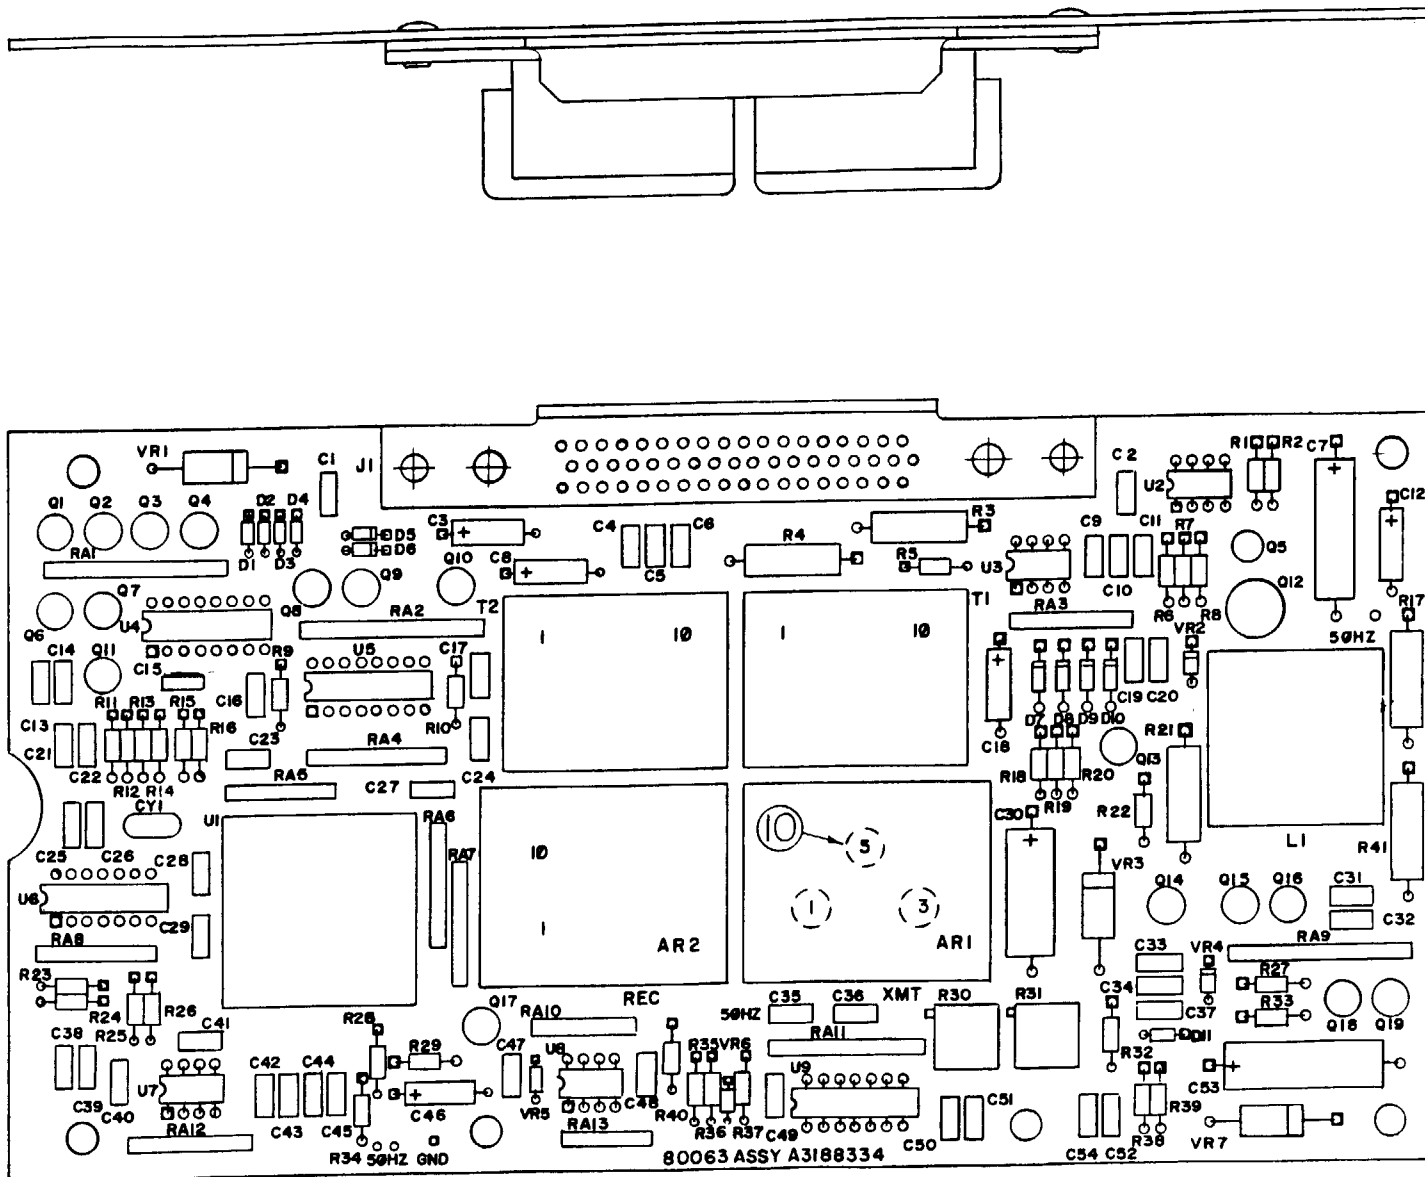

TM 11-5805-650-34P

Figure 3A. Circuit Card Assembly TA-838/TT and TA-838A/TT, Part No. A3188334.


(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
GROUP 01 CIRCUIT CARD ASSEMBLY TA-838A/TT					
FIG. 3					
1	PAHZZ	80063	SM-D-986355	AMPLIFIER ASSY SEND UOC:EUG	1
2	PAHZZ	80063	SM-D-986363	AMPLIFIER ASSY RECV UOC:EUG	1
3	PAHZZ	12969	CGB0220KDN	CAPACITOR CERAMIC UOC:EUG	1
4	PAHZZ	81349	M39003/1E-2836	CAPACITOR FXD ELEC UOC:EUG	3
5	PAHZZ	12969	CGB0103KDX	CAPACITOR CERAMIC UOC:EUG	4
6	PAHZZ	12969	CGB0221KDX	CAPACITOR CERAMIC UOC:EUG	2
7	PAHZZ	12969	CGB471KDX	CAPACITOR CERAMIC UOC:EUG	1
8	PAHZZ	12969	CGE0104KDX	CAPACITOR CERAMIC UOC:EUG	14
9	PAHZZ	12969	CGB0472KDX	CAPACITOR CERAMIC UOC:EUG	1
10	PAHZZ	12969	CGC0223KDX	CAPACITOR CERAMIC UOC:EUG	3
11	PAHZZ	81349	M39003/02-0189	CAPACITOR, FIXED, ELE UOC:EUG	4
12	PAHZZ	12969	CGB222KDX	CAPACITOR CERAMIC UOC:EUG	2
13	PAHZZ	12969	CGB0101KDX	CAPACITOR CERAMIC UOC:EUG	3
14	PAHZZ	12969	CGE0104FDX	CAPACITOR CERAMIC UOC:EUG	2
15	PAHZZ	12969	CGB682KDX	CAPACITOR CERAMIC UOC:EUG	1
16	PAHZZ	81349	M39014-02-1338	CAPACITOR, FIXED, CER UOC:EUG	2
17	PAHZZ	81349	M39003/1E-5090	CAPACITOR FXD ELEC UOC:EUG	1
18	PAHZZ	81349	M39003/3B-0187	CAPACITOR FXD ELEC UOC:EUG	1
19	PAHZZ	12969	CGB0102KDX	CAPACITOR CERAMIC UOC:EUG	2
20	PAHZZ	81349	M39006/22-0517	CAPACITOR, FIXED, ELE UOC:EUG	1
21	PAHZZ	81349	CK06BX474K	CAPACITOR, FIXED, CER UOC:EUG	1
22	PAHZZ	81349	M3098/42	CRYSTAL QUARTZ UOC:EUG	1
23	PAHZZ	81349	M3098/3	CRYSTAL QUARTZ UOC:EUG	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
24	PAHZZ	81349	JAN1N4148-1	SEMICONDUCTOR DEVIC UOC:EUG	7
25	PAHZZ	81349	JAN1N4245	SEMICONDUCTOR DEVIC UOC:EUG	8
26	PAHZZ	80063	SM-A-790700	LIGHT EMITTING DIOD UOC:EUG	1
27	PBHZZ	80063	SM-C-790734	CONNECTOR, RECEPTACL UOC:EUG	1
28	PAHZZ	81349	M24308/23	CONNECTOR UOC:EUG	1
29	PAHZZ	96906	MS21390-24	COIL,RADIO FREQUENC UOC:EUG	1
30	PAHZZ	80063	SM-C-790728	INDUCTOR,SINGLE FRE UOC:EUG	1
31	PAHZZ	80063	SM-C-994233	TEST PLUG UOC:EUG	2
32	PAHZZ	81349	JAN2N2907A	TRANSISTOR UOC:EUG	7
33	PAHZZ	81349	JAN2N2222A	TRANSISTOR UOC:EUG	13
34	PAHZZ	12969	2N5338	TRANSISTOR POWER UOC:EUG	1
35	PAHZZ	81349	RNC55H1003FS	RESISTOR, FIXED, FILM UOC:EUG	2
36	PAHZZ	81349	RNC55H6190FS	RESISTOR, FIXED, FILM UOC:EUG	1
37	PAHZZ	81349	RNC55H2742FS	RESISTOR, FIXED, FILM UOC:EUG	2
38	PAHZZ	81349	RNC55H2052FS	RESISTOR, FIXED, FILM UOC:EUG	1
39	PAHZZ	81349	RNC55H1001FS	RESISTOR, FIXED, FILM UOC:EUG	1
40	PAHZZ	81349	RNC65H1001FS	RESISTOR, FIXED, FILM UOC:EUG	2
41	PAHZZ	81349	RNC65H4701FS	RESISTOR, FIXED, FILM UOC:EUG	1
42	PAHZZ	81349	RNC65H6190FS	RESISTOR, FIXED, FILM UOC:EUG	1
43	PAHZZ	81349	RNC55H1002FS	RESISTOR, FIXED, FILM UOC:EUG	2
44	PAHZZ	81349	RNC55H5621FS	RESISTOR, FIXED, FILM UOC:EUG	2
45	PAHZZ	81349	RNC65H4300FS	RESISTOR FXD FILM UOC:EUG	1
46	PAHZZ	07960	5033RD3R300D12TT 1	RESISTOR FXD FILM UOC:EUG	1
47	PAHZZ	81349	RNC55H1780FS	RESISTOR, FIXED, FILM UOC:EUG	1
48	PAHZZ	81349	RJ50CP204	RESISTOR, VARIABLE, N UOC:EUG	3
49	PAHZZ	81349	RJ50CP504	RESISTOR, VARIABLE, N UOC:EUG	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
50	PAHZZ	80063	SM-A-790712-18	RESISTOR NETWORK UOC:EUG	1
51	PAHZZ	80063	SM-A-790712-19	RESISTOR NETWORK UOC:EUG	1
52	PAHZZ	80063	SM-A-790712-21	RESISTOR NETWORK UOC:EUG	1
53	PAHZZ	80063	SM-A-790712-22	RESISTOR NETWORK UOC:EUG	1
54	PAHZZ	80063	SM-A-790712-23	RESISTOR NETWORK UOC:EUG	1
55	PAHZZ	80063	SM-A-790712-24	RESISTOR NETWORK UOC:EUG	1
56	PAHZZ	80063	SM-A-790712-25	RESISTOR NETWORK UOC:EUG	1
57	PAHZZ	80063	SM-A-790712-26	RESISTOR NETWORK UOC:EUG	1
58	PAHZZ	80063	SM-A-790712-27	RESISTOR NETWORK UOC:EUG	1
59	PAHZZ	80063	SM-A-790712-28	RESISTOR NETWORK UOC:EUG	1
60	PAHZZ	80063	SM-A-790712-29	RESISTOR NETWORK UOC:EUG	1
61	PAHZZ	80063	SM-A-790712-30	RESISTOR NETWORK UOC:EUG	1
62	PAHZZ	80063	SM-A-790712-31	RESISTOR NETWORK UOC:EUG	1
63	PAHZZ	80063	SM-C-790727	TRANSFORMER, AUDIO F UOC:EUG	1
64	PAHZZ	80063	SM-C-790726	TRANSFORMER, AUDIO F UOC:EUG	1
65	PAHZZ	01760	MPD80C48D	INTEGRATED CKT UOC:EUG	1
66	PAHZZ	81349	M38510/17701	INTEGRATED CKT UOC:EUG	1
67	PAHZZ	81349	M38510/17505	MICROCIRCUIT UOC:EUG	1
68	PAHZZ	04713	MM54HC00J	MICROCIRCUIT UOC:EUG	1
69	PAHZZ	81349	M38510/17702	MICROCIRCUIT UOC:EUG	1
70	PAHZZ	18714	CD54HC163	MICROCIRCUIT UOC:EUG	1
71	PAHZZ	04713	MC14163B	MICROCIRCUIT UOC:EUG	1
72	PAHZZ	81349	M38510/05101	INTEGRATED CKT UOC:EUG	1
73	PAHZZ	81349	M38510/05852	MICROCIRCUIT UOC:EUG	1
74	PAHZZ	81349	M38510/05553	MICROCIRCUIT UOC:EUG	1
75	PAHZZ	81349	M38510/17001	MICROCIRCUIT UOC:EUG	2

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
76	PAHZZ	27014	TP5089	MICROCIRCUIT UOC:EUG	1
77	PAHZZ	18714	CA3420AS	MICROCIRCUIT UOC:EUG	4
78	PAHZZ	80063	SM-A-790739	MICROCIRCUIT,LINEAR UOC:EUG	1
79	PAHZZ	32293	1CL7611BMTV	MICROCIRCUIT UOC:EUG	2
80	PAHZZ	04713	MC14538BALDS	MICROCIRCUIT UOC:EUG	1
81	PAHZZ	04713	1N4685	DIODE ZENER UOC:EUG	1
82	PAHZZ	81349	JAN1N3033B	SEMICONDUCTOR DEVIC UOC:EUG	2
83	PAHZZ	04713	1N4690	DIODE ZENER UOC:EUG	1
84	PAHZZ	04713	1N4681	DIODE ZENER UOC:EUG	1
85	PAHZZ	14933	7702812XB	MICROCIRCUIT,LINEAR UOC:EUG	1
86	PAHZZ	81349	JAN1N3018B	SEMICONDUCTOR DEVIC UOC:EUG	1
87	PAHZZ	96906	MS16535-157	RIVET,TUBULAR UOC:EUG	2
88	PAHZZ	80063	SM-B-790761	SHIM UOC:EUG	2
89	PAHZZ	80063	SM-B-994237	STANDOFF UOC:EUG	3

END OF FIGURE

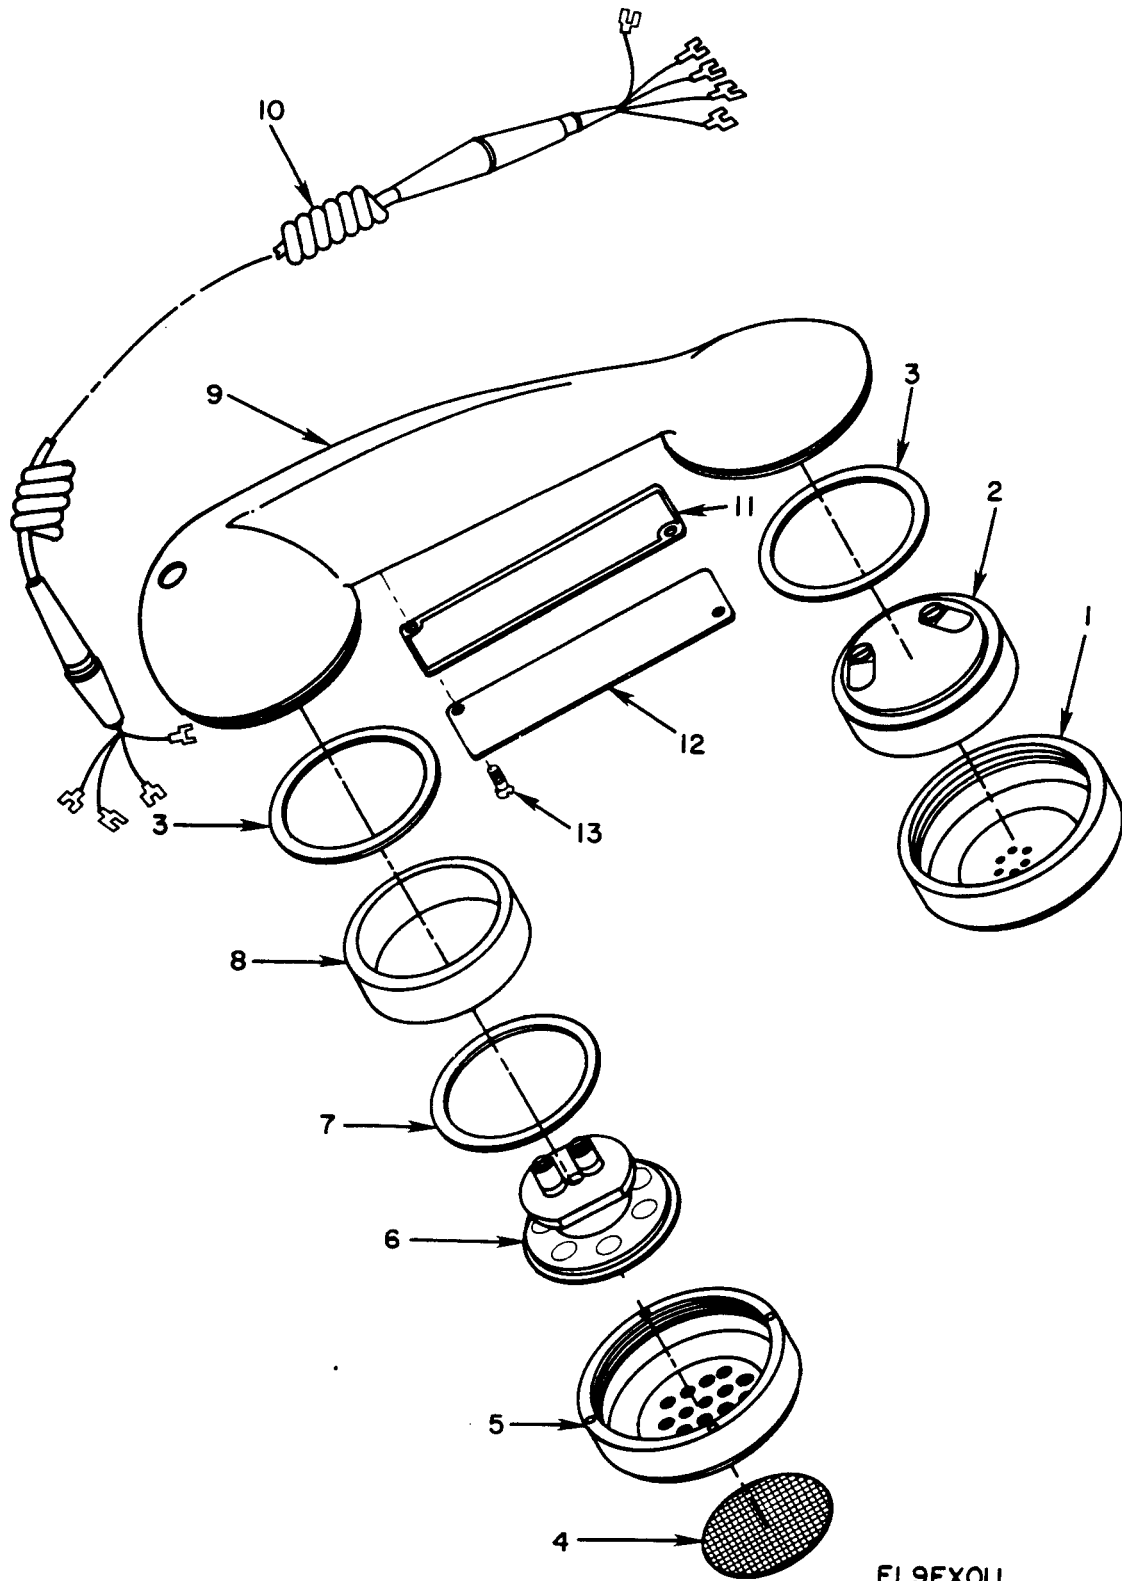


EL9EX011

Figure 4. Handset Assembly


(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
GROUP 02 HANDSET ASSEMBLY					
FIG. 4					
1	PAFZZ	80063	SM-D-790668	CAP, RECEIVER, HANDSE	1
2	PAFZZ	80058	TA-235/PT	EARPHONE ELEMENT	1
3	XBFZZ	80063	SM-C-790687-4	GASKET	2
4	PAOZZ	80063	SM-B-207932	FILTER ELEMENT, AIR FOR USE IN COLD WEATHER OPERATION ONLY	1
5	PAFZZ	80063	SM-D-790667	CAP, TRANSMITTER, HAN	1
6	PAFZZ	80063	SM-C-790793	MICROPHONE, DYNAMIC	1
7	PAFZZ	80063	SM-C-790687-3	GASKET	1
8	PAFZZ	80063	SM-C-790732	ADAPTER, HANSET	1
9	PAFZZ	80063	SM-D-790666	HANDLE, HANDSET	1
10	PAFZZ	80063	SM-C-790738	CORD ASSEMBLY, ELECT	1
11	XBFZZ	80063	SM-C-790671	GASKET	1
12	PAFZZ	80063	SM-C-790809	COVER, ACCESS	1
13	PAFZZ	96906	MS24693C3	SCREW, MACHINE	2

END OF FIGURE

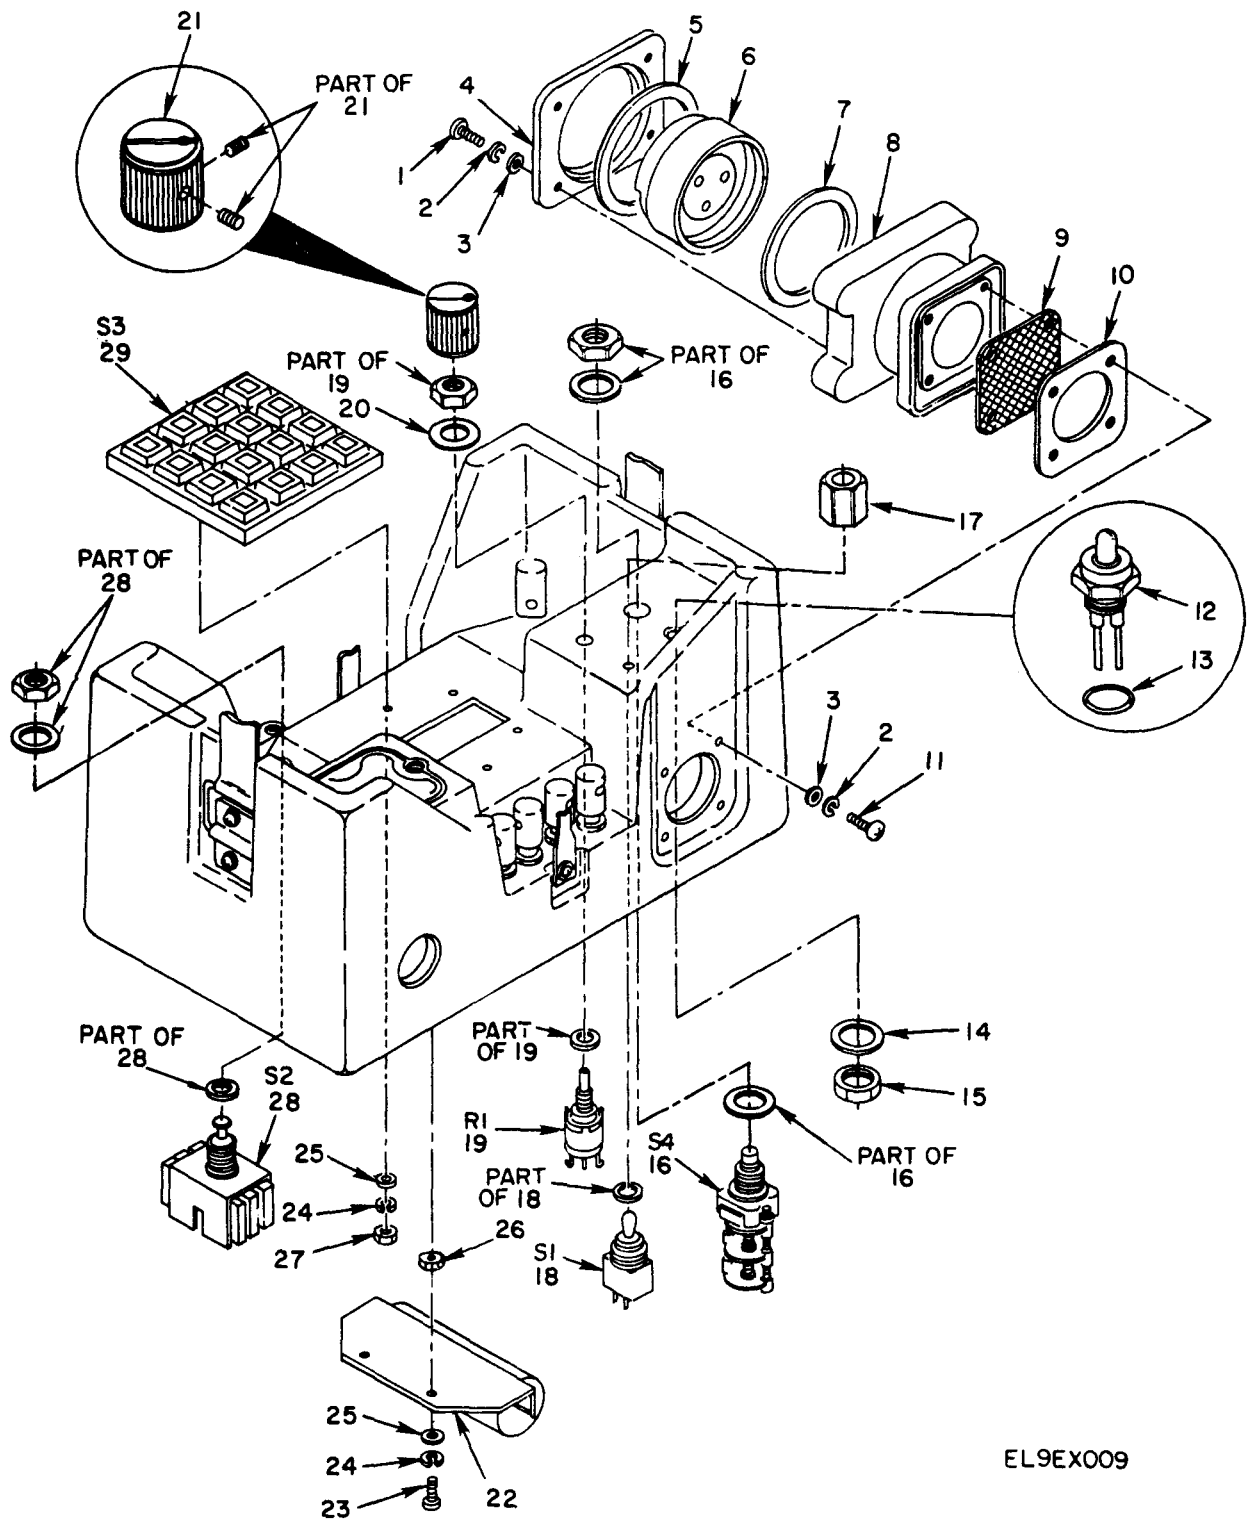

EL9EX009

Figure 5. Shell Assembly (sheet 1 of 2)

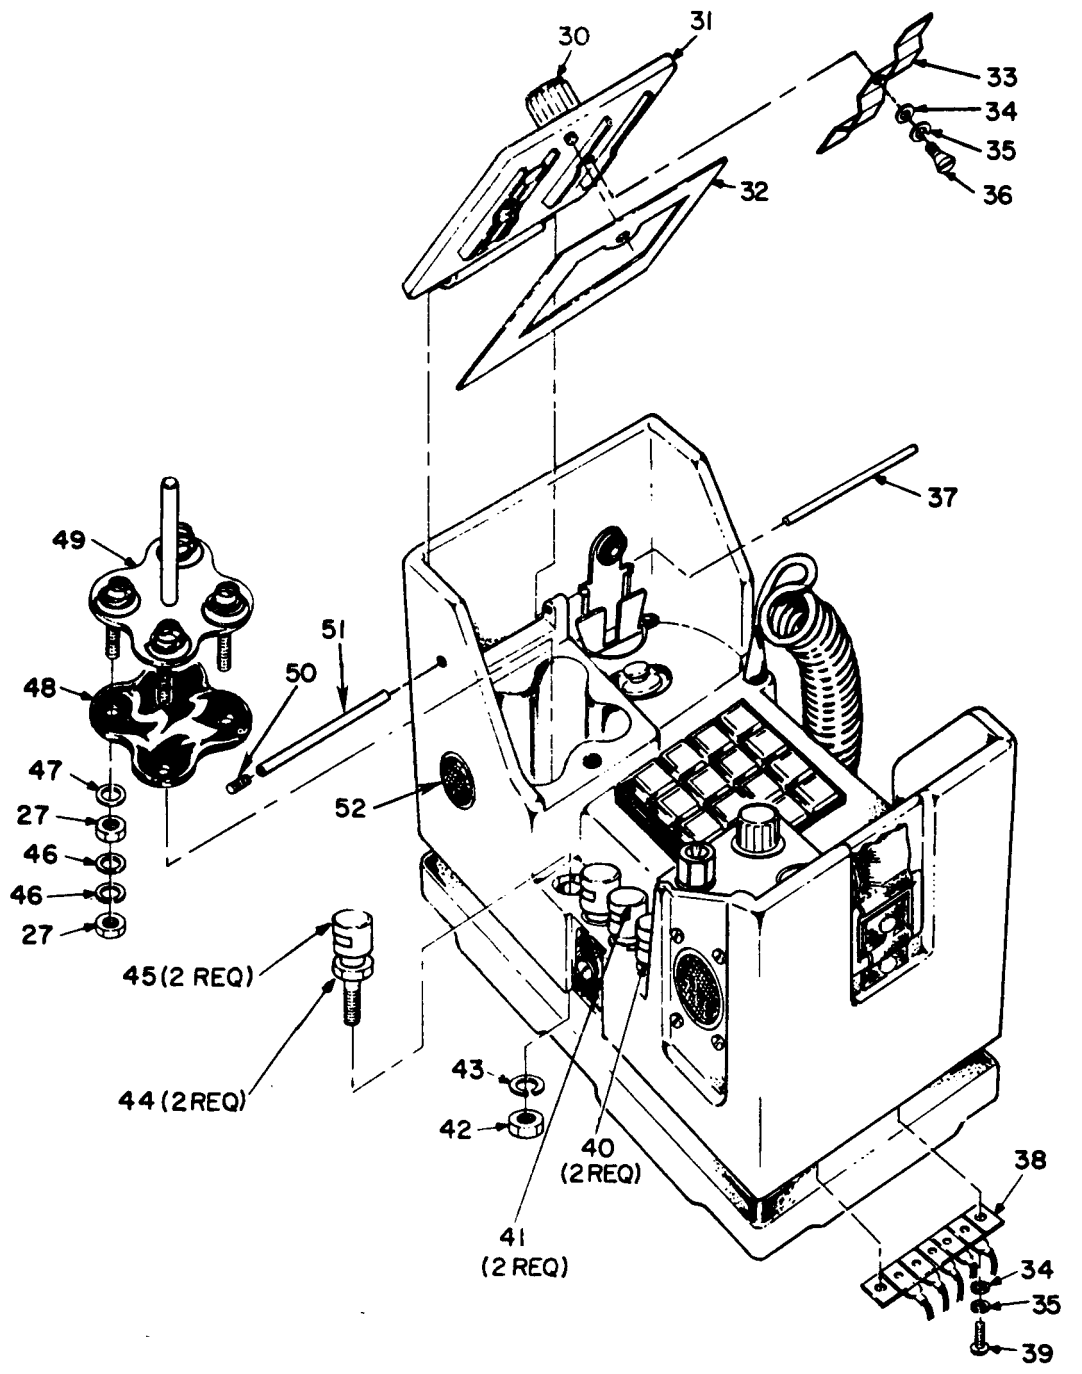

EL9EX010

Figure 5. Shell Assembly (sheet 2 of 2)

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
GROUP 03 SHELL ASSEMBLY					
FIG. 5					
1	PAFZZ	96906	MS24693C4	SCREW, MACHINE	4
2	PAFZZ	96906	MS35338-137	WASHER, LOCK	4
3	PAFZZ	96906	MS15795-807	WASHER, FLAT	4
4	PAFZZ	80063	SM-C-790686	BRACKET, LOUDSPEAKER	1
5	PAFZZ	80063	SM-C-790687-1	GASKET	1
6	PAFZZ	80063	SM-A-790701	EARPHONE ELEMENT	1
7	PAFZZ	80063	SM-C-790687-2	GASKET	1
8	PAFZZ	80063	SM-D-790676	HORN LOUDSPEAKER	1
9	PAFZZ	80063	SM-C-790684	GASKET	1
10	XBFZZ	80063	SM-C-790682	GRILLE, METAL	1
11	PAFZZ	96906	MS51957-44	SCREW, MACHINE	4
12	PAFZZ	80063	SM-C-790693	LIGHT, INDICATOR	1
13	PAFZZ	80063	SM-B-790760	WASHER, FLAT	1
14	PAFZZ	96906	MS9321-11	WASHER, FLAT	1
15	PAFZZ	96906	MS25082B5	NUT, PLAIN, HEXAGON	1
16	PAHZZ	80063	SM-A-790680	SWITCH, ROTARY	1
17	PAFZZ	80063	SM-B-994214	NUT HEX UOC: EUG	1
18	PAFZZ	80063	SM-A-790804	SWITCH, TOGGLE	1
19	PAFZZ	81349	RV6SAYSA253E	RESISTOR, VARIABLE, N	1
20	PAFZZ	79318	100578	WASHER, FLAT	1
21	PAOZZ	96906	MS91528-0C1B	KNOB	1
22	PAFZZ	80063	SM-C-790770	TERMINAL BOX	1
23	PAFZZ	96906	MS51957-26	SCREW, MACHINE	2
24	PAFZZ	96906	MS35338-136	WASHER, LOCK	2
25	PAFZZ	80063	SM-B-416109-1	WASHER, FLAT	2
26	PAFZZ	80063	SM-B-790773	NUT, PLAIN, HEXAGON	2
27	PAFZZ	96906	MS35649-264	NUT, PLAIN, HEXAGON	4
28	PAFZZ	80063	SM-D-790752	SWITCH, PUSH	1
29	PAFZZ	80063	SM-D-790799	SWITCH, PUSH	1
30	PAFZZ	80063	SM-B-790683	SCREW, EXTERNALLY RE	1
31	PAHZZ	80063	SM-D-790675	COVER, BATTERY	1
32	PAFZZ	80063	SM-C-790689	GASKET	1
33	PAFZZ	80063	SM-C-790678	CONTACT, ELECTRICAL	2
34	PAFZZ	96906	MS15795-803	WASHER, FLAT	2
35	PAFZZ	96906	MS35338-135	WASHER, LOCK	4
36	PAFZZ	96906	MS51957-14	SCREW, MACHINE	2
37	PAHZZ	80063	SM-B-790685	PIN, STRAIGHT, KNURLE UOC: CFS	1
38	PAFZZ	81349	25TB5	TERMINAL BOARD	1
39	PAFZZ	96906	MS51957-17	SCREW, MACHINE	2
40	PAFZZ	81349	PB08NA01	POST, BINDING, ELECTR	2
41	PAOZZ	80063	SC-C-76202-1	BOOT, DUST AND MOIST UOC: CFS	2
42	PAFZZ	96906	MS35650-304	NUT, PLAIN, HEXAGON	2
43	PAFZZ	96906	MS35333-73	WASHER, LOCK	2
44	PAFZZ	81349	PB08NA02	POST, BINDING, ELECTR	2

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODE (UOC)	(6) QTY
45	PAOZZ	80063	SC-C-76202-2	CAP,ELECTRICAL UOC:CFS	2
46	PAFZZ	96906	MS35333-71	WASHER,LOCK	2
47	PAFZZ	88044	AN960C6L	WASHER,FLAT	4
48	PAFZZ	80063	SM-B-790704	GASKET	1
49	PAFZZ	80063	SM-C-790699	CONTACT ASSY ELEC	1
50	PAHZZ	96906	MS-51981-46	SETSCREW UOC:EUG	2
51	PAHZZ	80063	SM-B-994213	PIN HINGE UOC:EUG	1
52	XBFZZ	80063	SM-C-790757	EQUALIZER,AIR PRESS	1

END OF FIGURE

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER INDEX					
STOCK NUMBER	FIG.	ITEM	STOCK NUMBER	FIG.	ITEM
5910-00-005-3468	2	65	5965-00-549-0220	4	2
5910-00-007-3974	2	78	5310-00-582-5677	2	35
5910-00-010-8160	2	52	5310-00-595-6211	5	34
5910-00-010-8718	3	16	5310-00-616-3555	5	46
5305-00-054-5648	5	36	5310-00-638-9857	5	47
5305-00-054-5649	1	31	5940-00-681-9771	5	38
5305-00-054-5651	5	39	5961-00-702-3435	2	16
5305-00-054-6650	5	23	5305-00-715-1215	5	50
5305-00-054-6667	1	20	5310-00-722-5998	1	15
5305-00-054-6669	1	21	5305-00-763-6963	1	4
	5	11		1	17
5305-00-056-9961	5	1	5310-00-782-1349	1	35
5355-00-057-7794	5	21	5961-00-814-9532	2	2
5330-00-079-4578	1	11	5961-00-842-6181	2	13
5310-00-087-2855	5	15		3	86
5999-00-102-6170	2	4	5320-00-850-2272	2	72
5905-00-106-3668	2	54		3	87
5961-00-107-4740	2	18	5961-00-850-9438	2	15
5910-00-113-5465	2	57		3	82
	3	21	5970-00-869-6263	5	41
5910-00-113-5499	2	20	5310-00-880-5976	1	33
5910-00-113-5689	2	55	5310-00-880-5978	1	9
5910-00-113-9449	2	22		1	22
5905-00-128-6237	2	75		5	3
5905-00-138-1017	3	37	5905-00-914-9256	2	66
5905-00-138-3376	3	39	5961-00-924-6981	3	25
5910-00-148-9365	2	79	5961-00-925-3777	2	11
5910-00-154-0547	2	50		3	32
5905-00-173-5014	3	49	5940-00-926-8162	5	44
5905-00-194-8390	3	36	5905-00-926-8708	2	67
5905-00-223-2741	3	43	5310-00-929-6395	1	6
5905-00-223-3230	3	42		1	16
5305-00-225-6400	4	13		5	24
5940-00-254-2243	5	45	5310-00-933-8118	1	25
5905-00-256-5051	3	44		1	32
5910-00-270-3081	2	42		5	35
5905-00-305-5270	2	36	5310-00-934-9761	5	27
5905-00-320-6544	2	28	5310-00-934-9765	5	42
5950-00-325-6110	2	19	5940-00-937-5237	5	40
4130-00-392-7628	4	4	5310-00-945-0528	5	14
5905-00-401-7432	3	35	5961-00-951-8757	2	1
5961-00-410-3900	2	34		3	33
5905-00-432-6364	3	38	5340-00-956-4436	1	34
5905-00-465-0333	2	62	5305-00-958-2918	1	18
5905-00-482-7751	3	40	5310-00-973-8660	1	5
5905-00-434-7889	3	47		5	25
5910-00-495-0042	2	43	5905-01-012-6155	3	48
5910-00-496-4096	3	11	5905-01-014-4527	2	44
5905-00-499-6755	2	27	5905-01-014-4528	2	51
5310-00-543-5933	5	43	5905-01-014-4529	2	69

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	NATIONAL STOCK NUMBER INDEX		STOCK NUMBER	FIG. ITEM	
	FIG.	ITEM		FIG.	ITEM
5905-01-014-4530	2	39	5305-01-019-1011	1	8
5905-01-014-6497	2	29	5330-01-019-1022	5	32
5905-01-014-6498	2	33	5330-01-019-1023	5	48
5905-01-014-6499	2	21	5999-01-019-6678	2	81
5905-01-014-6500	2	49	5935-01-019-8949	5	16
5905-01-014-6501	2	41	5905-01-024-5362	2	40
5995-01-014-9442	4	10	5905-01-024-5363	2	26
5330-01-014-9446	5	5	5905-01-024-5364	2	80
5805-01-014-9595	4	1	5905-01-024-5365	2	63
5805-01-014-9596	4	5	5935-01-026-8964	1	38
5340-01-015-1216	1	13	5961-01-026-8965	2	6
6210-01-015-1226	5	12	5961-01-026-8966	2	9
5305-01-015-1232	5	30	5961-01-026-8968	2	8
5330-01-015-1237	1	12	5961-01-026-8969	2	12
5330-01-015-1238	5	9	5905-01-027-4858	2	77
5330-01-015-1239	5	7	5999-01-027-4859	5	33
5330-01-015-1240	4	7	5961-01-027-4863	2	5
5310-01-015-1245	5	13	5961-01-027-4864	2	3
9905-01-015-1247	1	30	5910-01-029-3822	1	36
5340-01-015-1254	1	28	5910-01-029-8906	2	76
5975-01-015-1258	1	26	5325-01-034-2870	1	29
5999-01-015-3901	2	14	5961-01-038-6918	2	7
5305-01-016-2297	1	24		3	24
5950-01-016-6805	2	74	5310-01-040-4754	5	20
	3	30	5910-01-043-5771	2	53
5962-01-016-6806	2	48	5910-01-043-6892	2	47
	3	78	5910-01-044-3579	2	64
5965-01-016-6913	5	6	5910-01-044-8562	2	82
5955-01-016-6920	2	59	5910-01-049-3154	2	24
5965-01-016-6929	4	6	5962-01-081-3923	3	85
5930-01-016-6930	5	28	5965-01-104-6277	5	8
5930-01-016-6931	5	29	5910-01-119-4292	2	38
5805-01-016-6936	2	32	5910-01-119-4305	2	73
5950-01-016-6941	2	45		3	20
	3	64	5950-01-145-3216	3	29
5950-01-016-6942	2	83	5805-01-151-9934	1	3
	3	63	5965-01-153-0355	5	4
5965-01-016-6943	1	1	5965-01-155-0857	4	12
5962-01-016-6969	2	58	5315-01-155-9933	5	37
5962-01-016-6970	2	25	5965-01-161-1000	4	9
5805-01-016-6974	1	3	5965-01-162-8436	4	8
5310-01-016-9345	5	26	5805-01-164-0840	5	31
5905-01-016-9578	2	46	5905-01-166-8211	3	41
5940-01-016-9595	5	22	5340-01-168-6467	1	27
5935-01-016-9621	2	70	5905-01-170-9063	2	61
	3	27	5905-01-173-8931	2	30
5950-01-017-7310	2	56	5905-01-188-6490	2	68
5905-01-017-8657	5	19	6625-01-204-8214	3	31
5360-01-017-9236	1	14	5998-01-359-9315	1	*3
5930-01-019-0987	5	18			

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX		ITEM
		STOCK NUMBER	FIG.	
80063	A3188334	5998-01-359-9315	1	*3
88044	AN960C6L	5310-00-638-9857	5	47
18714	CA3420AS		3	77
18714	CD54HC163		3	70
12969	CGB0101KDX		3	13
12969	CGB0102KDX		3	19
12969	CGB0103KDX		3	5
12969	CGB0220KDN		3	3
12969	CGB0221KDX		3	6
12969	CGB0472KDX		3	9
12969	CGB222KDX		3	12
12969	CGB471KDX		3	7
12969	CGB682KDX		3	15
12969	CGC0223KDX		3	10
12969	CGE0104FDX		3	14
12969	CGE0104KDX		3	8
81349	CK06BX474K	5910-00-113-5465	3	21
81349	CMR05E220J0DR	5910-00-005-3468	2	65
81349	CMR05E820G0DR	5910-01-044-3579	2	64
81349	CMR05F101G0DR	5910-01-043-6892	2	47
81349	CMR05F111G0DR	5910-01-044-8562	2	82
81349	CMR05F201G0DR	5910-01-043-5771	2	53
81349	CMR06F102G0DR	5910-01-029-8906	2	76
81349	CMR06F511G0DR	5910-01-029-3822	1	36
81349	CMR07F103F0DR	5910-01-049-3154	2	24
81349	CQ09A1MCL02K3		1	37
81349	JAN1N3018B	5961-00-842-6181	2	13
			3	86
81349	JAN1N3033B	5961-00-850-9438	2	15
			3	82
81349	JAN1N3330B	5961-00-410-3900	2	34
81349	JAN1N3600	5961-00-702-3435	2	16
81349	JAN1N4148-1	5961-01-038-6918	2	7
			3	24
81349	JAN1N4245	5961-00-924-6981	3	25
81349	JAN1N5288	5961-00-107-4740	2	18
81349	JAN2N2222A	5961-00-951-8757	2	1
			3	33
81349	JAN2N2484	5961-00-814-9532	2	2
81349	JAN2N2907A	5961-00-925-3777	2	11
			3	32
04713	MC14163B		3	71
04713	MC14538BALDS		3	80
04713	MM54HC00J		3	68
01760	MPDSOC48D		3	65
96906	MS-51981-46	5305-00-715-1215	5	50
96906	MS15795-803	5310-00-595-6211	5	34
96906	MS15795-804	5310-00-782-1349	1	35
96906	MS15795-805	5310-00-722-5998	1	15
96906	MS15795-806	5310-00-880-5976	1	33
96906	MS15795-807	5310-00-880-5978	1	9
			1	22

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX		FIG.	ITEM
		STOCK NUMBER			
96906	MS15795-807	5310-00-880-5978		5	3
96906	MS15795-810	5310-00-582-5677		2	35
96906	MS16535-157	5320-00-850-2272		2	72
				3	87
96906	MS21390-24	5950-01-145-3216		3	29
96906	MS24693C26	5305-00-958-2918		1	18
96906	MS24693C3	5305-00-225-6400		4	13
96906	MS24693C4	5305-00-056-9961		5	1
96906	MS25082B5	5310-00-087-2855		5	15
96906	MS27978-6B	5325-01-034-2870		1	29
96906	MS35333-71	5310-00-616-3555		5	46
96906	MS35333-73	5310-00-543-5933		5	43
96906	MS35338-135	5310-00-933-8118		1	25
				1	32
				5	35
96906	MS35338-136	5310-00-929-6395		1	6
				1	16
				5	24
96906	MS35338-137			1	10
				4	2
96906	MS35649-264	5310-00-934-9761		5	27
96906	MS35650-304	5310-00-934-9765		5	42
96906	MS51957-14	5305-00-054-5648		5	36
96906	MS51957-15	5305-00-054-5649		1	31
96906	MS51957-17	5305-00-054-5651		5	39
96906	MS51957-26	5305-00-054-6650		5	23
96906	MS51957-42	5305-00-054-6667		1	20
96906	MS51957-44	5305-00-054-6669		1	21
				5	11
96906	MS51959-28	5305-00-763-6963		1	4
				4	17
96906	MS75101-12	5950-01-017-7310		2	56
96906	MS75101-3	5950-00-325-6110		2	19
96906	MS9068-006	5330-00-079-4578		1	11
96906	MS91528-0C1B	5355-00-057-7794		5	21
96906	MS9321-11	5310-00-945-0528		5	14
81349	M24308/23			3	28
81349	M3098/3			3	23
81349	M3098/42			3	22
81349	M38510/05101			3	72
81349	M38510/05553			3	71
81349	M38510/05852			3	73
81349	M38510/17001			3	75
81349	M38510/17505			3	67
81349	M38510/17701			3	66
81349	M38510/17702			3	69
81349	M38527/1-01D	5999-01-015-3901		2	14
81349	M39003-01-0287			2	37
81349	M39003-01-2313	5910-00-154-0547		2	50
81349	M39003-01-2357	5910-00-495-0042		2	43
81349	M39003-01-3132	5910-00-010-8160		2	52

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX		FIG.	ITEM
		STOCK NUMBER			
81349	M39003-01-3185	5910-00-270-3081		2	42
81349	M39003/01-2991	5910-00-007-3974		2	78
81349	M39003/01-3015	5910-00-113-5689		2	55
81349	M39003/02-0189	5910-00-496-4096		3	11
81349	M39003/1E-2836			3	4
81349	M39003/1E-5090			3	17
81349	M39003/3B-0187			3	18
81349	M39006/22-0517	5910-01-119-4305		2	73
				3	20
81349	M39006/22-0631	5910-01-119-4292		2	38
81349	M39014-02-1338	5910-00-010-8718		3	16
81349	M39014/02-1347	5910-00-113-9449		2	22
81349	M39014/02-1350	5910-00-113-5499		2	20
81349	M39014/02-1360	5910-00-113-5465		2	57
81349	M39022-01-1669	5910-00-148-9365		2	79
81349	PB08NA01	5940-00-937-5237		5	40
81349	PB08NA02	5940-00-926-8162		5	44
81349	RCR07G220JS	5905-00-106-3668		2	54
81349	RCR07G3R3JS	5905-00-128-6237		2	75
81349	RCR07G565JS	5905-00-465-0333		2	62
81349	RJ50CP203	5905-00-499-6755		2	27
81349	RJ50CP204	5905-01-012-6155		3	48
81349	RJ50CP504	5905-00-173-5014		3	49
81349	RLR05C1001GS	5905-01-173-8931		2	30
81349	RLR05C6201GS	5905-01-170-9063		2	61
81349	RLR20C102GM	5905-00-926-8708		2	67
81349	RLR20C103JM	5905-00-914-9256		2	66
81349	RNC55H1001FS	5905-00-138-3376		3	39
81349	RNC55H1002FS	5905-00-223-2741		3	43
81349	RNC55H1003FS	5905-00-401-7432		3	35
81349	RNC55H1780FS	5905-00-484-7889		3	47
81349	RNC55H2052FS	5905-00-432-6364		3	38
81349	RNC55H2742FS	5905-00-138-1017		3	37
81349	RNC55H5621FS	5905-00-256-5051		3	44
81349	RNC55H6190FS	5905-00-194-8390		3	36
81349	RNC55K1623FS	5905-00-305-5270		2	36
81349	RNC65H1001FS	5905-00-482-7751		3	40
81349	RNC65H4300FS			3	45
81349	RNC65H4701FS	5905-01-166-8211		3	41
81349	RNC65H6190FS	5905-00-223-3230		3	42
81349	RNR60K1052FM	5905-00-320-6544		2	28
81349	RV6SAYSA253E	5905-01-017-8657		5	19
81349	RWR71S6811FS	5905-01-188-6490		2	68
80063	SC-C-76202-1	5970-00-869-6263		5	41
80063	SC-C-76202-2	5940-00-254-2243		5	45
80063	SM-A-790680	5935-01-019-8949		5	16
80063	SM-A-790700			3	26
80063	SM-A-790701	5965-01-016-6913		5	6
80063	SM-A-790712-1	5905-01-014-6497		2	29
80063	SM-A-790712-10	5905-01-014-4529		2	69
80063	SM-A-790712-11	5905-01-024-5365		2	63

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX		ITEM
		STOCK NUMBER	FIG.	
80063	SM-A-790712-12	5905-01-024-5364	2	80
80063	SM-A-790712-13	5905-01-024-5363	2	26
80063	SM-A-790712-14	5905-01-024-5362	2	40
80063	SM-A-790712-15	5905-01-027-4858	2	77
80063	SM-A-790712-16	5905-01-014-4530	2	39
80063	SM-A-790712-18		3	50
80063	SM-A-790712-19		3	51
80063	SM-A-790712-2	5905-01-014-6498	2	33
80063	SM-A-790712-21		3	52
80063	SM-A-790712-22		3	53
80063	SM-A-790712-23		3	54
80063	SM-A-790712-24		3	55
80063	SM-A-790712-25		3	56
80063	SM-A-790712-26		3	57
80063	SM-A-790712-27		3	58
80063	SM-A-790712-28		3	59
80063	SM-A-790712-29		3	60
80063	SM-A-790712-3	5905-01-014-6499	2	21
80063	SM-A-790712-30		3	61
80063	SM-A-790712-31		3	62
80063	SM-A-790712-4	5905-01-014-6500	2	49
80063	SM-A-790712-5	5905-01-014-6501	2	41
80063	SM-A-790712-7	5905-01-014-4527	2	44
80063	SM-A-790712-8	5905-01-016-9578	2	46
80063	SM-A-790712-9	5905-01-014-4528	2	51
80063	SM-A-790714	5955-01-016-6920	2	59
80063	SM-A-790715	5962-01-016-6970	2	25
80063	SM-A-790716	5962-01-016-6969	2	58
80063	SM-A-790716-6		2	23
80063	SM-A-790739	5962-01-016-6806	2	48
			3	78
80063	SM-A-790745		2	17
80063	SM-A-790746	5961-01-026-8968	2	8
80063	SM-A-790763	5961-01-026-8969	2	12
80063	SM-A-790766	5961-01-026-8965	2	6
80063	SM-A-790767	5961-01-026-8966	2	9
80063	SM-A-790768	5961-01-027-4863	2	5
80063	SM-A-790803	5961-01-027-4864	2	3
80063	SM-A-790804	5930-01-019-0987	5	18
80063	SM-B-207932	4130-00-392-7628	4	4
80063	SM-B-416109-1	5310-00-973-8660	1	5
			5	25
80063	SM-B-751245	5999-01-019-6678	2	81
80063	SM-B-751281-2	5340-00-956-4436	1	34
80063	SM-B-790683	5305-01-015-1232	5	30
80063	SM-B-790685	5315-01-155-9933	5	37
80063	SM-B-790688		1	23
80063	SM-B-790690	9905-01-015-1247	1	30
80063	SM-B-790703	5340-01-168-6467	1	27
80063	SM-B-790704	5330-01-019-1023	5	48
80063	SM-B-790719	5305-01-016-2297	1	24

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX	
		STOCK NUMBER	FIG. ITEM
80063	SM-B-790720	5305-01-019-1011	1 8
80063	SM-B-790760	5310-01-015-1245	5 13
80063	SM-B-790761		2 71
			3 88
80063	SM-B-790773	5310-01-016-9345	5 26
80063	SM-B-790797		2 31
80063	SM-B-790801		2 10
80063	SM-B-790807		1 19
80063	SM-B-790810	5340-01-015-1216	1 13
80063	SM-B-994213		5 51
80063	SM-B-994214		5 17
80063	SM-B-994237		3 89
80063	SM-C-790671		4 11
80063	SM-C-790674	5330-01-015-1237	1 12
80063	SM-C-790678	5999-01-027-4859	5 33
80063	SM-C-790682		5 10
80063	SM-C-790684	5330-01-015-1238	5 9
80063	SM-C-790686	5965-01-153-0355	5 4
80063	SM-C-790687-1	5330-01-014-9446	5 5
80063	SM-C-790687-2	5330-01-015-1239	5 7
80063	SM-C-790687-3	5330-01-015-1240	4 7
80063	SM-C-790687-4		4 3
80063	SM-C-790689	5330-01-019-1022	5 32
80063	SM-C-790693	6210-01-015-1226	5 12
80063	SM-C-790699		5 49
80063	SM-C-790702	5340-01-015-1254	1 28
80063	SM-C-790713	5360-01-017-9236	1 14
80063	SM-C-790718	5975-01-015-1258	1 26
80063	SM-C-790726	5950-01-016-6941	2 45
			3 64
80063	SM-C-790727	5950-01-016-6942	2 83
			3 63
80063	SM-C-790728	5950-01-016-6805	2 74
			3 30
80063	SM-C-790732	5965-01-162-8436	4 8
80063	SM-C-790734	5935-01-016-9621	2 70
			3 27
80063	SM-C-790736	5935-01-026-8964	1 38
80063	SM-C-790737		1 40
80063	SM-C-790738	5995-01-014-9442	4 10
80063	SM-C-790757		5 52
80063	SM-C-790770	5940-01-016-9595	5 22
80063	SM-C-790776		2 60
80063	SM-C-790793	5965-01-016-6929	4 6
80063	SM-C-790809	5965-01-155-0857	4 14
80063	SM-C-994233	6625-01-204-8214	3 31
80063	SM-D-790665	5965-01-016-6943	1 1
80063	SM-D-790666	5965-01-161-1000	4 9
80063	SM-D-790667	5805-01-014-9596	4 5
80063	SM-D-790668	5805-01-014-9595	4 1
80063	SM-D-790672		1 2

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	PART NUMBER INDEX		FIG.	ITEM
		STOCK NUMBER			
80063	SM-D-790673			1	7
80063	SM-D-790675	5805-01-164-0840		5	31
80063	SM-D-790676	5965-01-104-6277		5	8
80063	SM-D-790711	5805-01-016-6974		1	3
80063	SM-D-790744	5805-01-016-6936		2	32
80063	SM-D-790752	5930-01-016-6930		5	28
80063	SM-D-790753			1	39
80063	SM-D-790799	5930-01-016-6931		5	29
80063	SM-D-986348	5805-01-151-9934		1	3
80063	SM-D-986355			4	1
80063	SM-D-986363			3	2
80058	TA-235/PT	5965-00-549-0220		4	2
27014	TP5089			3	76
32293	1CL7611BMTV			3	79
04713	1N4681			3	84
04713	1N4685			3	81
04713	1N4690			3	83
79318	100578	5310-01-040-4754		5	20
07047	10216-DAP	5999-00-102-6170		2	4
12969	2N5338			3	34
73734	23021			1	41
81349	25TB5	5940-00-681-9771		5	38
07960	5033RD3R300D12TT			3	46
	1				
14933	7702812XB	5962-01-081-3923		3	85

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
 Commander
 Stateside Army Depot
 ATTN: AMSTA-US
 Stateside, N.J. 07703-5007

DATE SENT
 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
 SSG I. M. DeSpirito of 999-1776

SIGN HERE

TEA. LONG PERFORATED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

SAMPLE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATION LINE

LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-5805-650-34P

PUBLICATION DATE

12 Sep 85

PUBLICATION TITLE

TELEPHONE SET
TA-838/TT AND TA-838A/TT

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

11 1/2" X 17" (330 X 430) (1:1)

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG

PAITED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG

SEPARATED LINE

By Order of the Secretary of the Army:

JOHN A. WICKHAM JR.
General, United States Army
Chief of Staff

Official:

DONALD J. DELANDRO
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36 literature requirements for TA-838/TT.

