

**ARMY  
NAVY  
AIR FORCE**

**TM 11-5820-667-20P  
EE150-JC-PLO-010/PRC77  
TO 31R2-2PRC77-24**

---

**ORGANIZATIONAL MAINTENANCE  
REPAIR PARTS AND SPECIAL TOOLS LIST**

**F O R**

**RADIO SET AN/PRC77  
(NSN 5820-00-930-3724)**

Distribution authorized to the Department of Defense and DOD contractors only for official use for administration or operational purposes. This determination was made on 4 May 1989. Other requests for this document will be referred to Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-ME-P, Fort Monmouth, NJ 07703-5000.

DESTRUCTION NOTICE-Destroy by any method that will prevent disclosure of Contents or reconstruction of the document.

---

**DEPARTMENTS OF THE ARMY, THE NAVY AND THE AIR FORCE**

**15 AUGUST 1989**



Technical Manual  
No. 11-5820-667-20P  
Technical Manual  
No. EE150-JC-PLO-010/PRC77  
Technical Order  
TO 31R2-2PRC77-24

DEPARTMENTS OF THE ARMY,  
THE NAVY AND THE AIR FORCE

Washington, DC, 15 August 1989

**ORGANIZATIONAL MAINTENANCE  
REPAIR PARTS AND SPECIAL TOOLS LIST  
FOR  
RADIO SET AN/PRC-77  
(NSN 5820-00-930-3724)**

Current as of 15 May 1989

**REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS**

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-ME-PS, Fort Monmouth, New Jersey 07703-5000.

For Air Force, submit AFTO Form 22 (Technical Order System Publication Improvement Report and Reply) in accordance with paragraph 6-5, Section VI, T.O. 00-5-1. Forward direct to prime ALC/MST.

For Navy, mail comments to the Commander, Space and Naval Warfare Systems Command, ATTN: SPAWAR 8122, Washington, DC, 20363-5100.

In either case, a reply will be furnished direct to you.

**Table of Contents**

		<b>Page</b>	<b>Illus / Figure</b>
<b>Section</b>	<b>I.</b>	<b>Introduction . . . . .</b>	<b>1</b>
	<b>II.</b>	<b>Repair Parts List. . . . .</b>	<b>1-1</b>

—\*This manual supersedes TM 11-5820-667-20P, 1 January 1987.

**Table of Contents-Continued**

			Page	Illus / Figure	
Group	00	Radio Set AN/PRC-77. . . . .	1-1	1	
	01	Antenna AT-271A/PRC-77 . . . . .	2-1	2	
	02	Harness, Electrical Equipment ST-138/PRC-25 (No parts authorized)			
	03	Bag, Cotton Duck CW-503/PRC (No parts authorized)			
	04	Handset H-189/GR (See TM 11-5965- 280-15 for parts)			
	05	Receiver-Transmitter RT-841/PRC-77. . . .	3-1	3	
		Receiver-Transmitter RT-841/PRC-77, Case Assembly (A2) . . . . .	4-1	4	
		0501 Battery Box CY-2562/PRC-25 (A100) . . . . .	6-1	6	
		0502 Front Panel Assembly (A300) (Includes Antenna Loading Network (A28)) . . . . .	7-1	7	
		0503 Chassis Assembly (A200) (No parts authorized)			
	Section	III.	Special Tools (Not applicable)		
		IV.	Cross-Reference Indexes		
		National Stock Number Index . . . . .	I-1		
		Part Number Index . . . . .	I-2		
	Figure and Item Number Index . . . . .	I-4			

**SECTION 1****INTRODUCTION**

---

**1. Scope**

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of organizational maintenance of the AN/PRC-77. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

**2. General**

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts list are composed of functional groups in ascending item number sequence. Figure numbers are listed directly beneath the group header.


b. Section III. Special Tools List. Not applicable.

c. Section IV. Cross-Reference Indexes. A list, in National item identification number (NIIN) sequence, of all National stock numbered items appearing in the listing, followed by a list in alphameric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance. The figure number and item number index lists figure and item numbers in numeric sequence and cross-references National stock number, Federal Supply Code for Manufacturer and part numbers.

**3. Explanation of Columns (Section II and III)**

a. Item No. (Column (1) ). Indicates the number used to identify items called out in the illustration.

b. SMR Code (Column (2)). The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

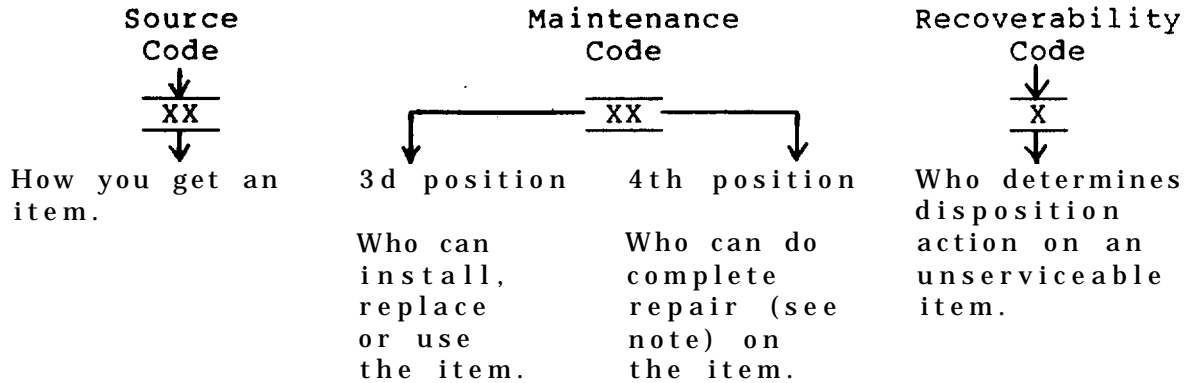

**NOTE**

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) Source code. The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

<u>Code</u>	<u>Explanation</u>
<div style="border: 1px solid black; padding: 5px; display: inline-block;">                     PA PB PC PD PE PF PG                 </div>	<p>Stocked items: use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code.</p>

**NOTE**

Items coded PC are subject to deterioration.

<div style="border: 1px solid black; padding: 5px; display: inline-block;">                     KD KF KB                 </div>	<p>Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kit must be requested and applied.</p>
---	---

<u>Code</u>	<u>Explanation</u>
MO - Made at Org/AVUM category	<p>Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.</p>
MF - Made at DS/AVIM category	
MH - Made at GS category	
ML - Made at Specialized Repair Activity (SRA)	
MD - Made at Depot	
AO - Assembled by org/AVUM category	<p>Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the third position code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.</p>
AF - Assembled by DS/AVIM category	
AH - Assembled by GS category	
AL - Assembled by SRA	
AD - Assembled by Depot	

<u>Code</u>	<u>Explanation</u>
XA - Do not requisition an "XA" coded item. Order its next higher assembly.	
XB - If an "XB" item is not available from salvage, order it using the FCSM and part number given.	
XC - Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number.	
XD - Item is not stocked. Order an "XD" coded item through normal supply channels using the FSCM and part number given, if not available.	

**NOTE**

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR750-1.

(2) Maintenance code. Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance,

<u>Code</u>	<u>Application/Explanation</u>
C -	Crew or operator maintenance done within organizational or aviation maintenance.
O -	Organizational or aviation unit category can remove, replace, and use the item.
F -	Direct support or aviation intermediate category can remove, replace, and use the item.
H -	General support category can remove, replace, and use the item.
L -	Specialized repair activity can remove, replace, and use the item.
D -	Depot category can remove, replace, and use the item.

(b) The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes.

**NOTE**

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

<u>Code</u>	<u>Application/Explanation</u>
O -	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F -	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H -	General support is the lowest category that can do complete repair of the item.
L -	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D -	Depot is the lowest category that can do complete repair of the item.



<u>Code</u>	<u>Application/Explanation</u>
-------------	--------------------------------

- |     |   |
|-----|---|
| Z - | Nonreparable. No repair is authorized.  |
| B - | No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item.)<br>However, the item may be reconditioned by adjusting, lubricating, etc., at the user category. |

(3) Recoverability code. Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows:

<u>Recoverability codes</u>	<u>Application\Explanation</u>
-----------------------------	--------------------------------

- |     |  |
|-----|--|
| Z - | Nonreparable item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR code.   |
| O - | Reparable item. When uneconomically repairable, condemn and dispose of the item at organizational or aviation unit category.   |
| F - | Reparable item. When uneconomically repairable, condemn and dispose of the item at direct support or aviation intermediate category.   |
| H - | Reparable item. When uneconomically repairable, condemn and dispose of the item at general support category.   |
| D - | Reparable item. When beyond lower category repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.  |
| L - | Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA).  |
| A - | Item requires special handling or condemnation procedures because of specific reasons (e.g., precious metal content, high dollar value, critical material, or hazardous material). Refer appropriate manuals/directives for specific instructions. |

c. FSCM (Column (3)). The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d. Part Number (Column (4)). Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

**NOTE**

When you use an NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e. Description and Usable on Code (UOC) (Column (5)). This column includes the following information.

(1) The Federal item name and, when required, a minimum description to identify the item.

(2) The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both section II and section III

f. Qty (Column (6)). Indicates the quantity of the item used in the 'breakout' shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

**4. Explanation of Columns (Section IV)**

a. National Stock Number (NSN) Index.

(1) Stock number column. This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).

(2) Fig. column. This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in sections II and III.

(3) Item column. The item number identifies the item associated with the figure listed in the adjacent Fig. column. This item is also identified by the NSN listed on the same line.

b. Part Number Index. Part numbers in this index are listed by part number in ascending alphameric sequence.

(1) FSCM column. This column lists the Federal supply code for manufacturer.

(2) Part number column. This column indicates the part number assigned to the item.

(3) Stock number column. This column lists the National stock number for the associated part number and manufacturer identified in the part number and FSCM columns to the left.

(4) Fig. column. This column lists the number of the figure where the item is identified/located in sections II and III.

(5) Item column. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

c. Figure and Item Number Index.

(1) Fig. column. This column lists the number of the figure where the item is identified\located in sections II and III.

(2) Item column. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

(3) Stock number column. This column lists the National stock number for the item.

(4) FSCM column. The Federal Supply code for manufacturer (FSCM) is a 5-digit numeric code used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

(5) Part number column. Indicates the primary number used by the manufacturer (individual, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of item.

## 5. Special Information

a. Associated Publications. The publications listed below pertain to the AN/PRC-77 and its components:

TM 11-5820-667-12, Radio Set AN/PRC-77

TM 11-5965-280-15, Handset H-189/GR

b. Illustrations - Listing. The illustrations in the RPSTL are identical to those published in TM 11-5829-667-34P. Only those parts coded "C" or "0" in the third position of the SMR code are listed in the tabular listing; therefore, there may be a break in the item number sequence, figure number and page number. Only illustrations containing organizational or aviation unit authorization items appear in the RPSTL.

c. National Stock Numbers. National stock numbers (NSN'S) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN'S are established and published, submit exception requisitions to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-MM, Fort Monmouth, NJ 07703-5000 for the part required to support your equipment.

## 6. How to Locate Repair Parts

a. When National stock number or part number is not known.

(1) First. Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

(2) Second. Find the figure covering the assembly group or subassembly group to which the item belongs.

(3) Third. Identify the item on the figure and note the item number.

(4) Fourth. Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.

(5) Fifth. Refer to the Part Number Index to find the NSN, if assigned.


b. When National stock number or part number is known.

(1) First. Using the index of National stock numbers and part numbers, find the pertinent National stock number or part number. The NSN index is in National item identification number (NIIN) sequence (para 4a (1)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4b). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) Second. After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

## 7. Abbreviations


Not applicable.

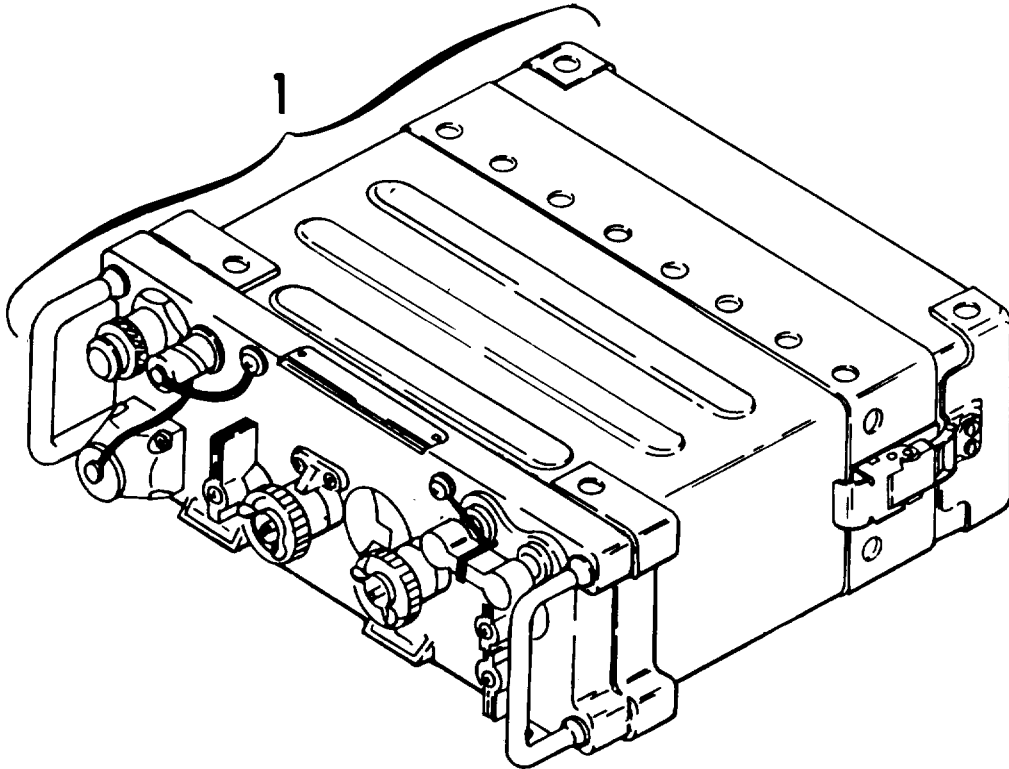

RECEIVER-TRANSMITTER

ELOMIOOI

Figure 1. Radio Set AN/PRC-77 (Sheet 1 of 2).

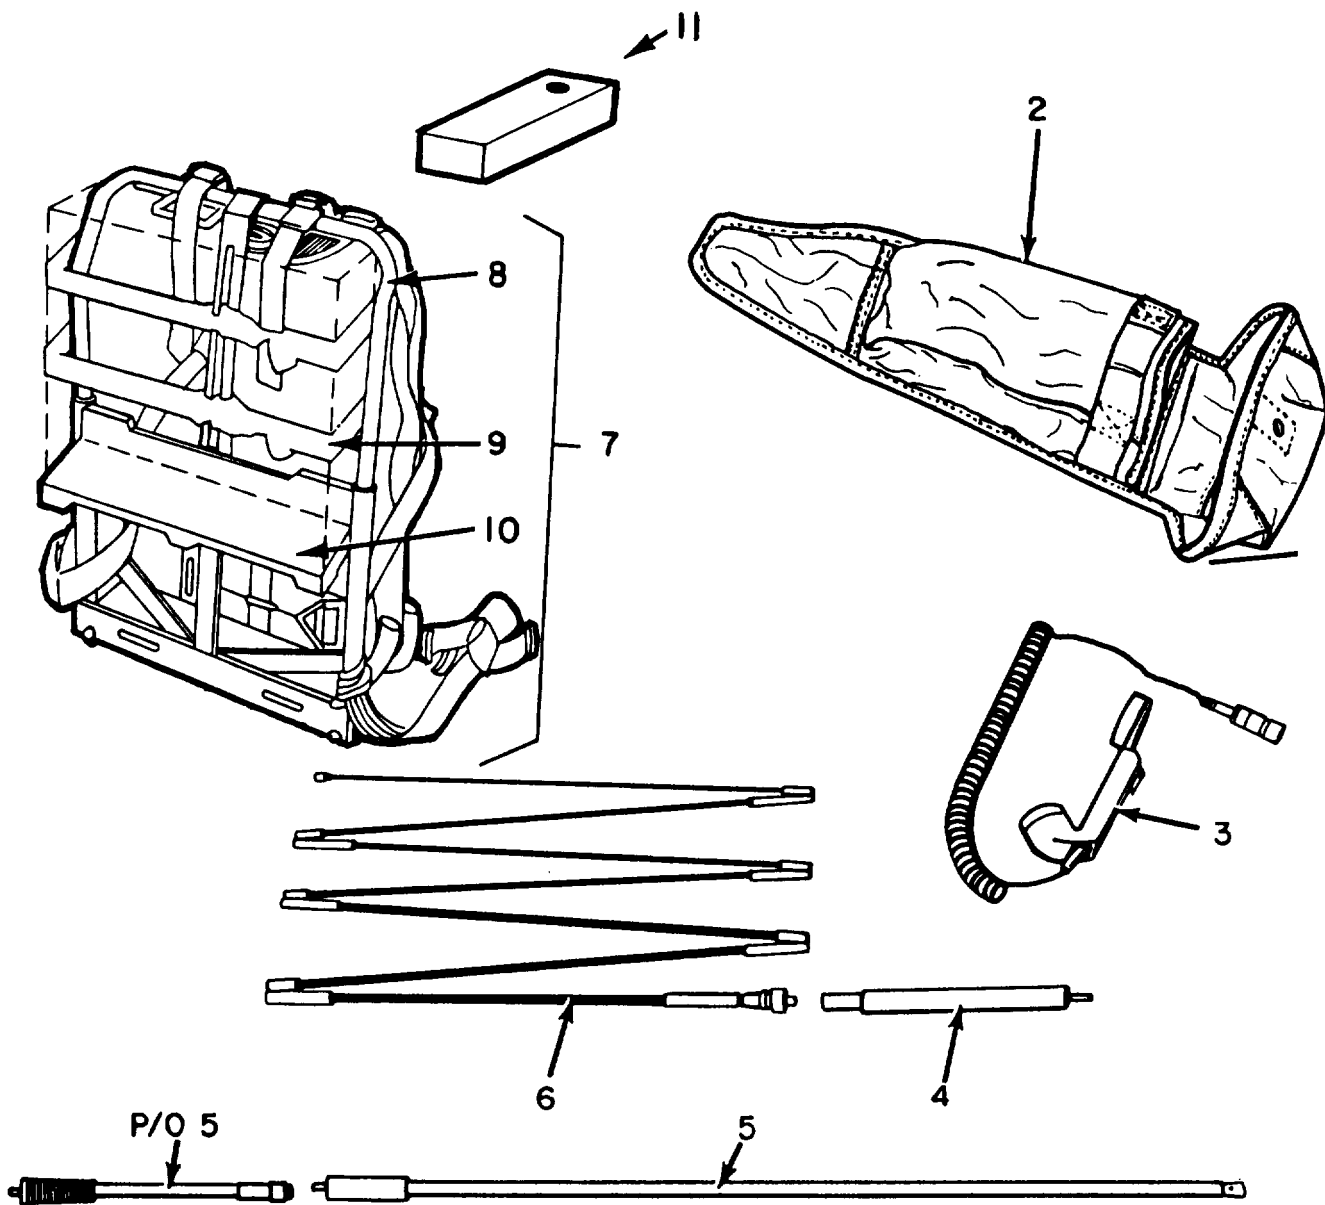

ELOMIO02

Figure 1. Radio Set AN/PRC-77 (Sheet 2 of 2).

(1) ITEM NO.	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
--------------------	--------------------	-------------	-----------------------	---	------------

GROUP 00 RADIO SET AN/PRC-77

## FIGURE 1

1 PAODD	80058		RT-841/PRC-77	RECEIVER-TRANSMITTE (FOR PARTS BREAKDOWN SEE FIGURE 3)	1
2 PAOZZ	80063		SM-C-447163	BAG,ACCESSORY	1
3 PAOZZ	80058		H-250/U	HANDSET	1
4 PAOZZ	80058		AB-591/PRC-25	SUPPORT,ANTENNA	1
5 PAOZZ	80058		AT-892/PRC-25	ANTENNA	1
6 PAOZZ	80058		AT-271A/PRC	ANTENNA (FOR PARTS BREAKDOWN SEE FIGURE 2)	1
7 AOOZZ	80058		ST-138/PRC-25	HARNES, ELECTRICAL	1
8 PAOZZ	81349		MIL-F-43834	FRAME, FIELD PACK LC-2	1
9 PAOZZ	81349		MIL-S-43828	STRAP, WEBBING	2
10 PAOZZ	81349		MIL-F-43834	SHELF, CARGO SUPPORT LC-1	1
11 PCOZZ	80058		BA4386PRC25	BATTERY, DRY	1
11 PCOZA	80058		BA-5598/U	BATTERY, NONRECHAR (FOR ARTIC OPERATION ONLY)	1

END OF FIGURE

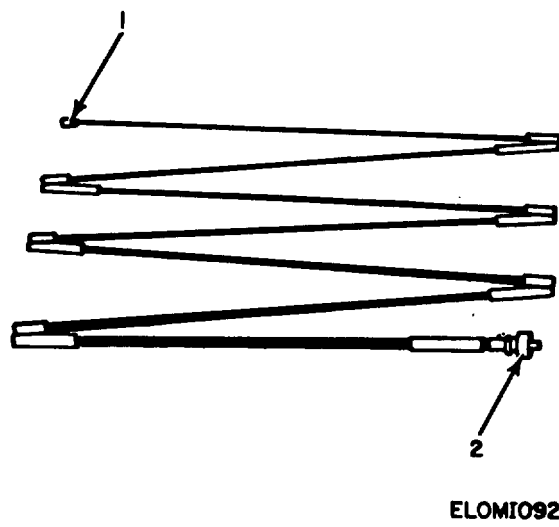


Figure 2. Antenna AT-271A/PRC.



(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO.	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY


GROUP 01 ANTENNA AT-271A/PRC

## FIGURE 2

1	PAOZZ	80063	SCB91329	CAP,ELECTRICAL	1
2	PAOZZ	80063	SM-B-182386	ADAPTER,ANTENNA TO	1


END OF FIGURE



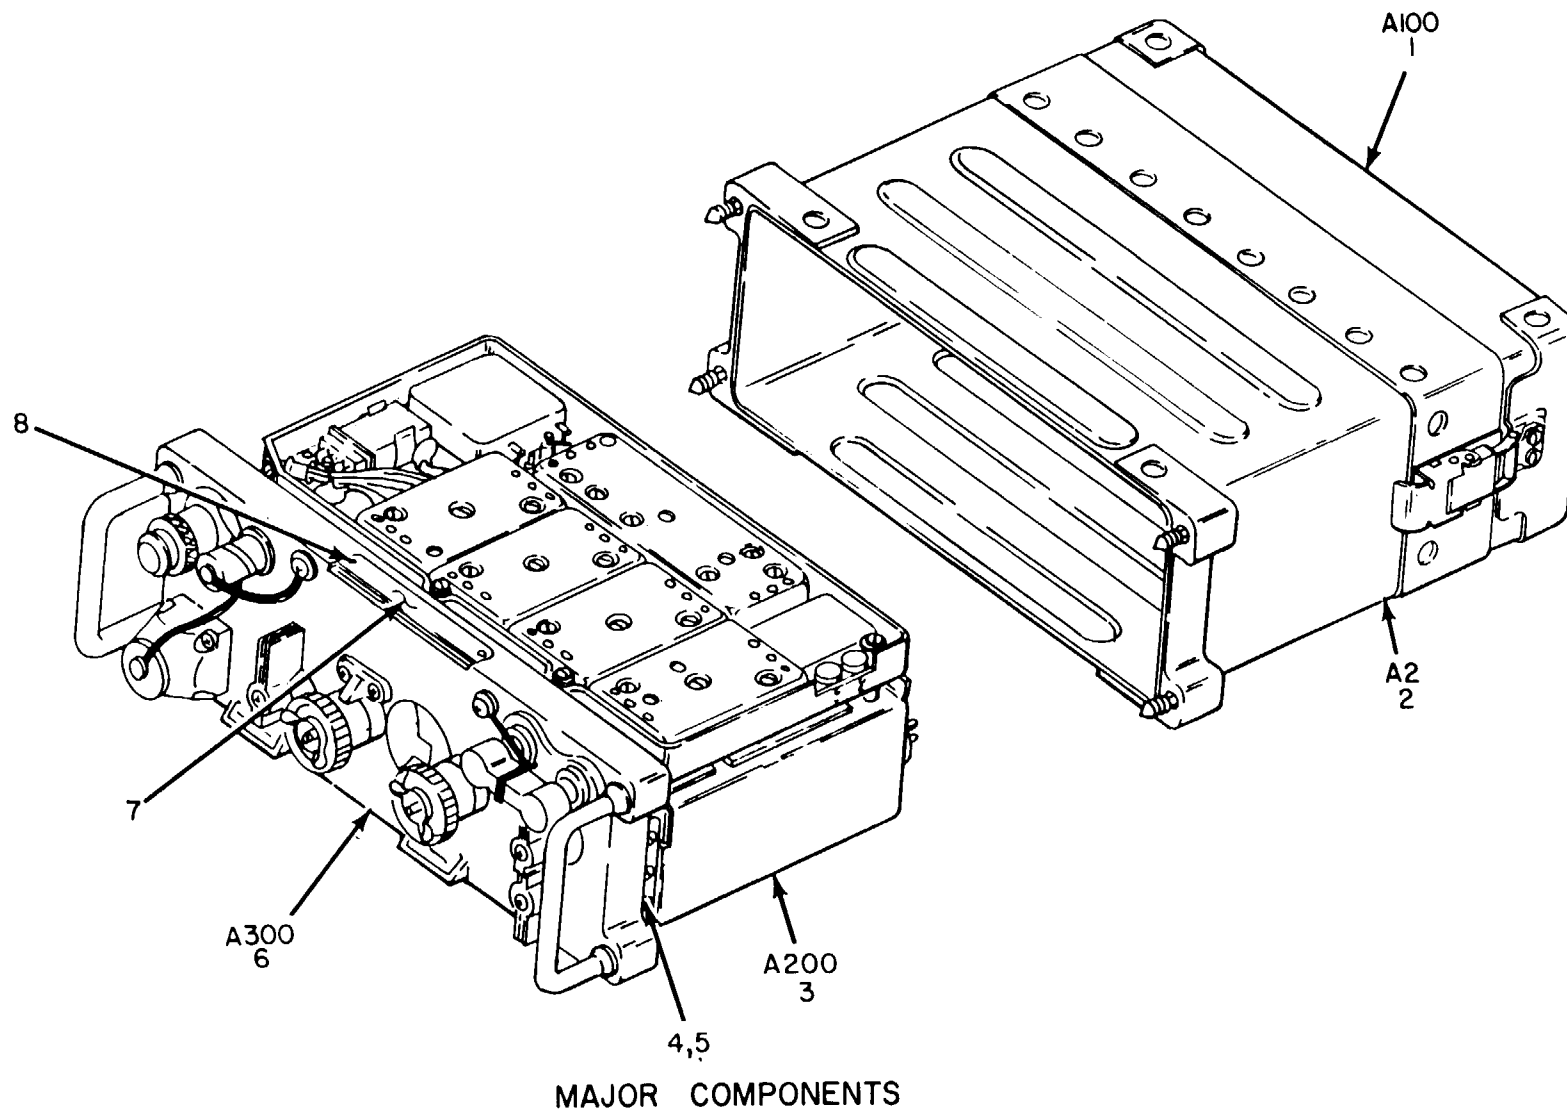

ELOMIO04

Figure 3. Receiver Transmitter RT-841/PRC-77 (SHEET 1 of 2)

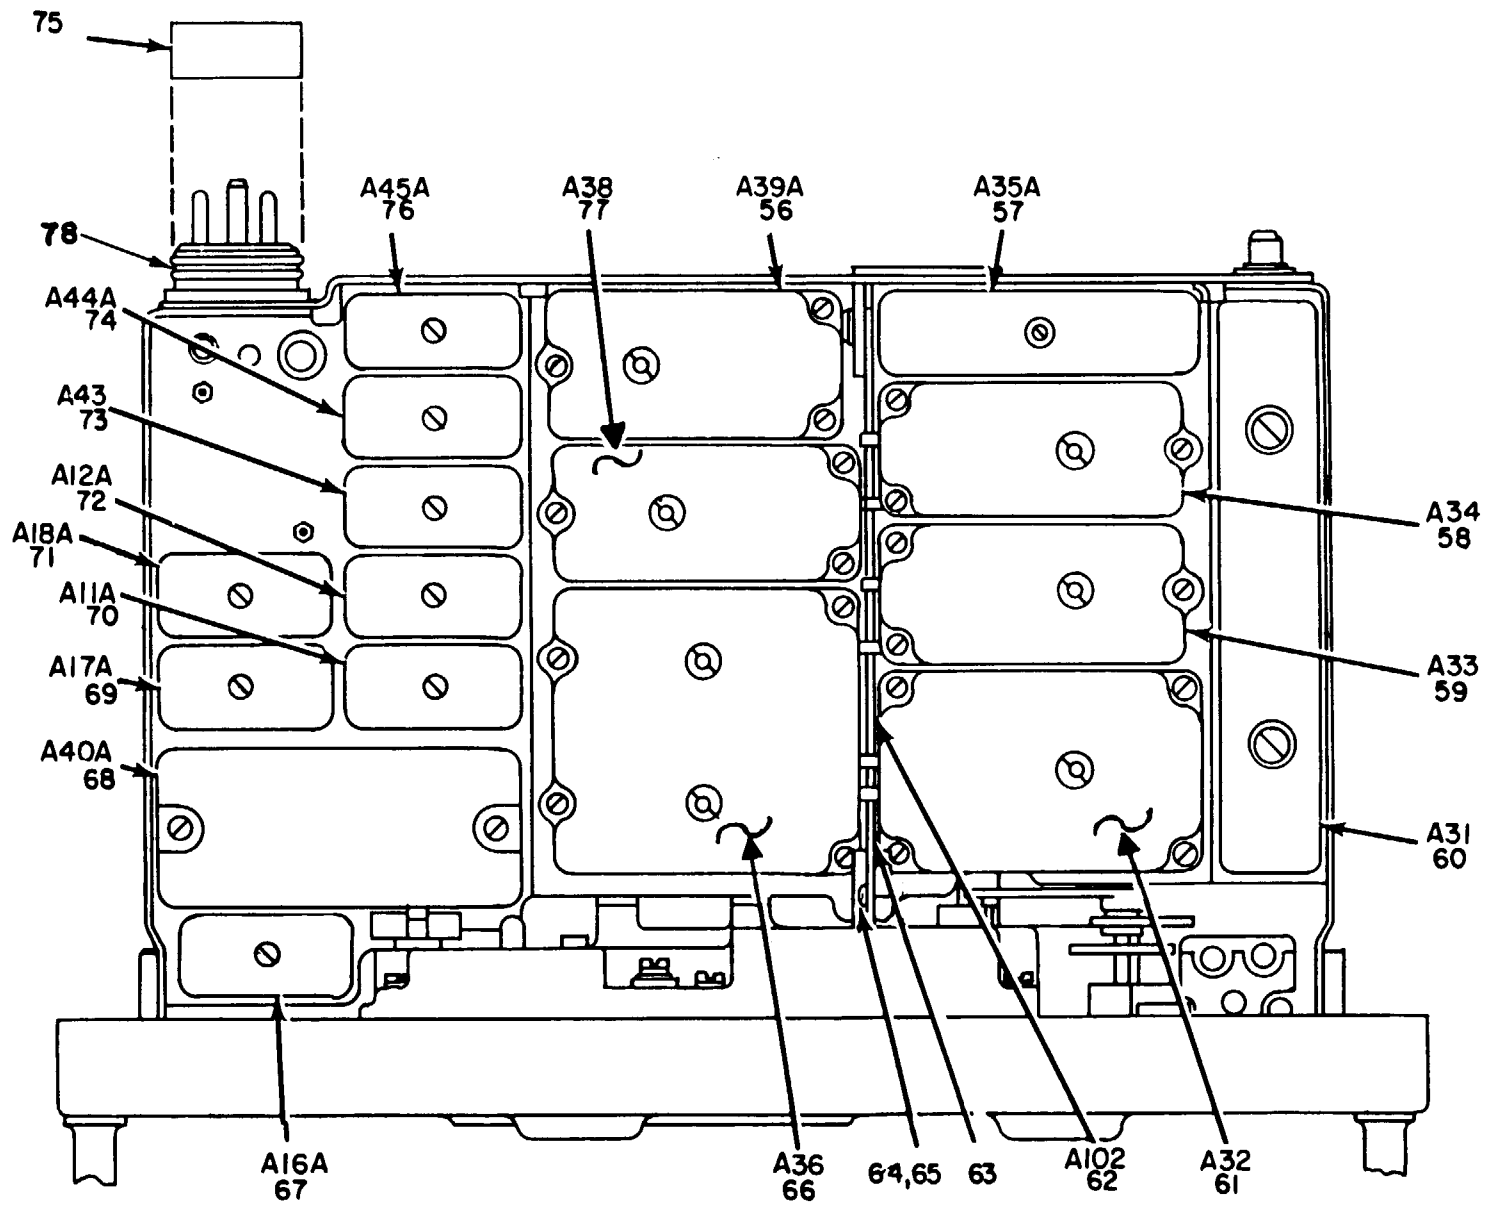

BOTTOM VIEW

ELOMI007

TM 11-5820-667-20P

Figure 3. Receiver-Transmitter RT-841/PRC-77 (SHEET 2 of 2)



SECTION II TM11-5820-667-20P

(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR	FSCM	PART	DESCRIPTION AND USABLE ON CODES(UOC)	QTY
NO.	CODE		NUMBER		
GROUP 05 RECEIVER-TRANSMITTER RT-841/PRC-77					

FIGURE 3

1	PAOZZ	80063	SMD447322	BATTERY BOX (FOR PARTS BREAKDOWN SEE FIGURE 6)	1
2	PAOHH	80063	SM-D-447351	CASE,RECEIVER-TRANS (FOR PARTS BREAKDOWN SEE FIGURE 4	1
75	PAOZZ	80063	SM-B-180054	GASKET	1
78	PAOZZ	96906	MS9021-020	PACKING,PREFORMED	2

END OF FIGURE

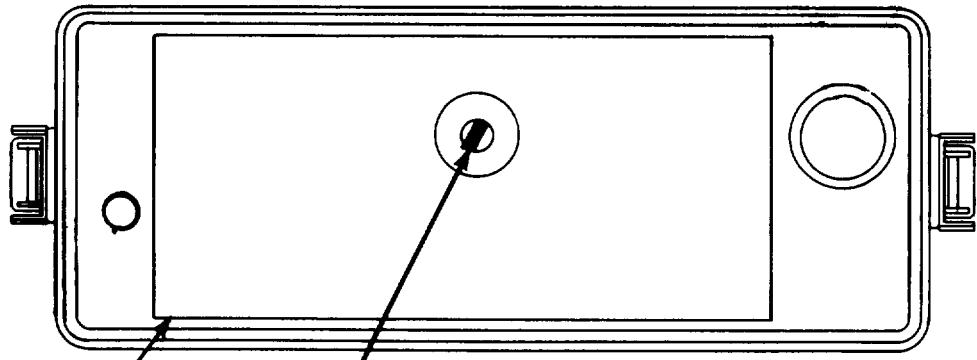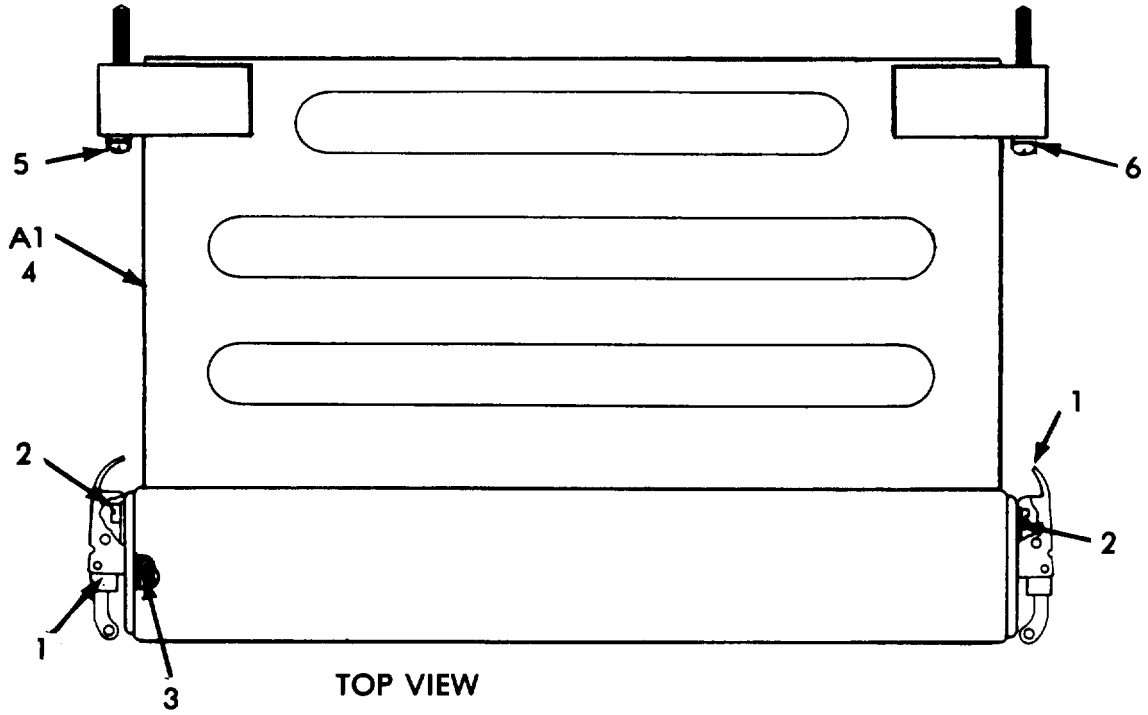

NOTE

FOR COMPLETE REFERENCE DESIGNATION  
PREFIX WITH A2.

ELOM1008

Figure 4. Receiver-Transmitter RT-841/PRC-77, Case Assembly (A2).


(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO.	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY

GROUP 05 RECEIVER-TRANSMITTER  
RT-841/PRC-77, CASE  
ASSEMBLY (A2)

## FIGURE 4

1	PAOZZ	80063	SM-C-447321-1	CATCH, CLAMPING	2
2	PAOZZ	96906	MS35206-226	SCREW, MACHINE	4
5	PAOZZ	80063	SM-B-447224	SCREW, EXTERNALLY RE	4
6	PAOZZ	80063	SM-B-447694-2	WASHER, LOCK	4

END OF FIGURE

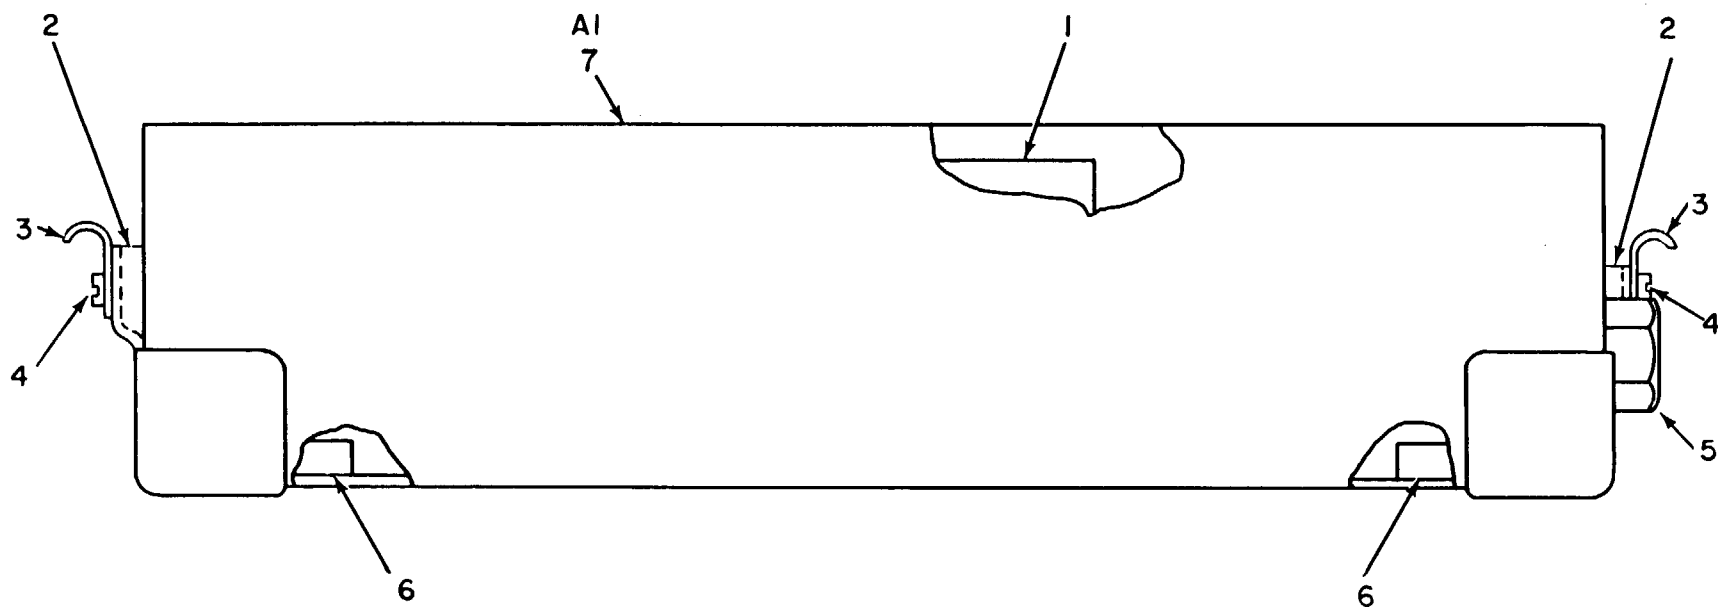

TM 11-5820-667-20P

NOTE: FOR COMPLETE REFERENCE DESIGNATION, PREFIX WITH A100.

ELOMIOIO

Figure 6. Battery Box CY-2562/PRC-25.



(1)	(2)	(3)	(4)	(5)	(6)
ITEM	SMR		PART		
NO.	CODE	FSCM	NUMBER	DESCRIPTION AND USABLE ON CODES(UOC)	QTY


GROUP 0501 BATTERY BOX CY-2562/  
PRC-25

## FIGURE 6

2	PAOZZ	80063	SM-B-447265	NUT, PLATE	2
3	PAOZZ	80063	SM-C-447321-2	STRIKE, CATCH	2
4	PAOZZ	96906	MS35206-226	SCREW, MACHINE	4
5	PAOZZ	80063	SM-D-447322-1	VALVE, SAFETY RELIEF	1
6	PAOZZ	80063	SM-B-447320	PAD, CUSHIONING	4

END OF FIGURE




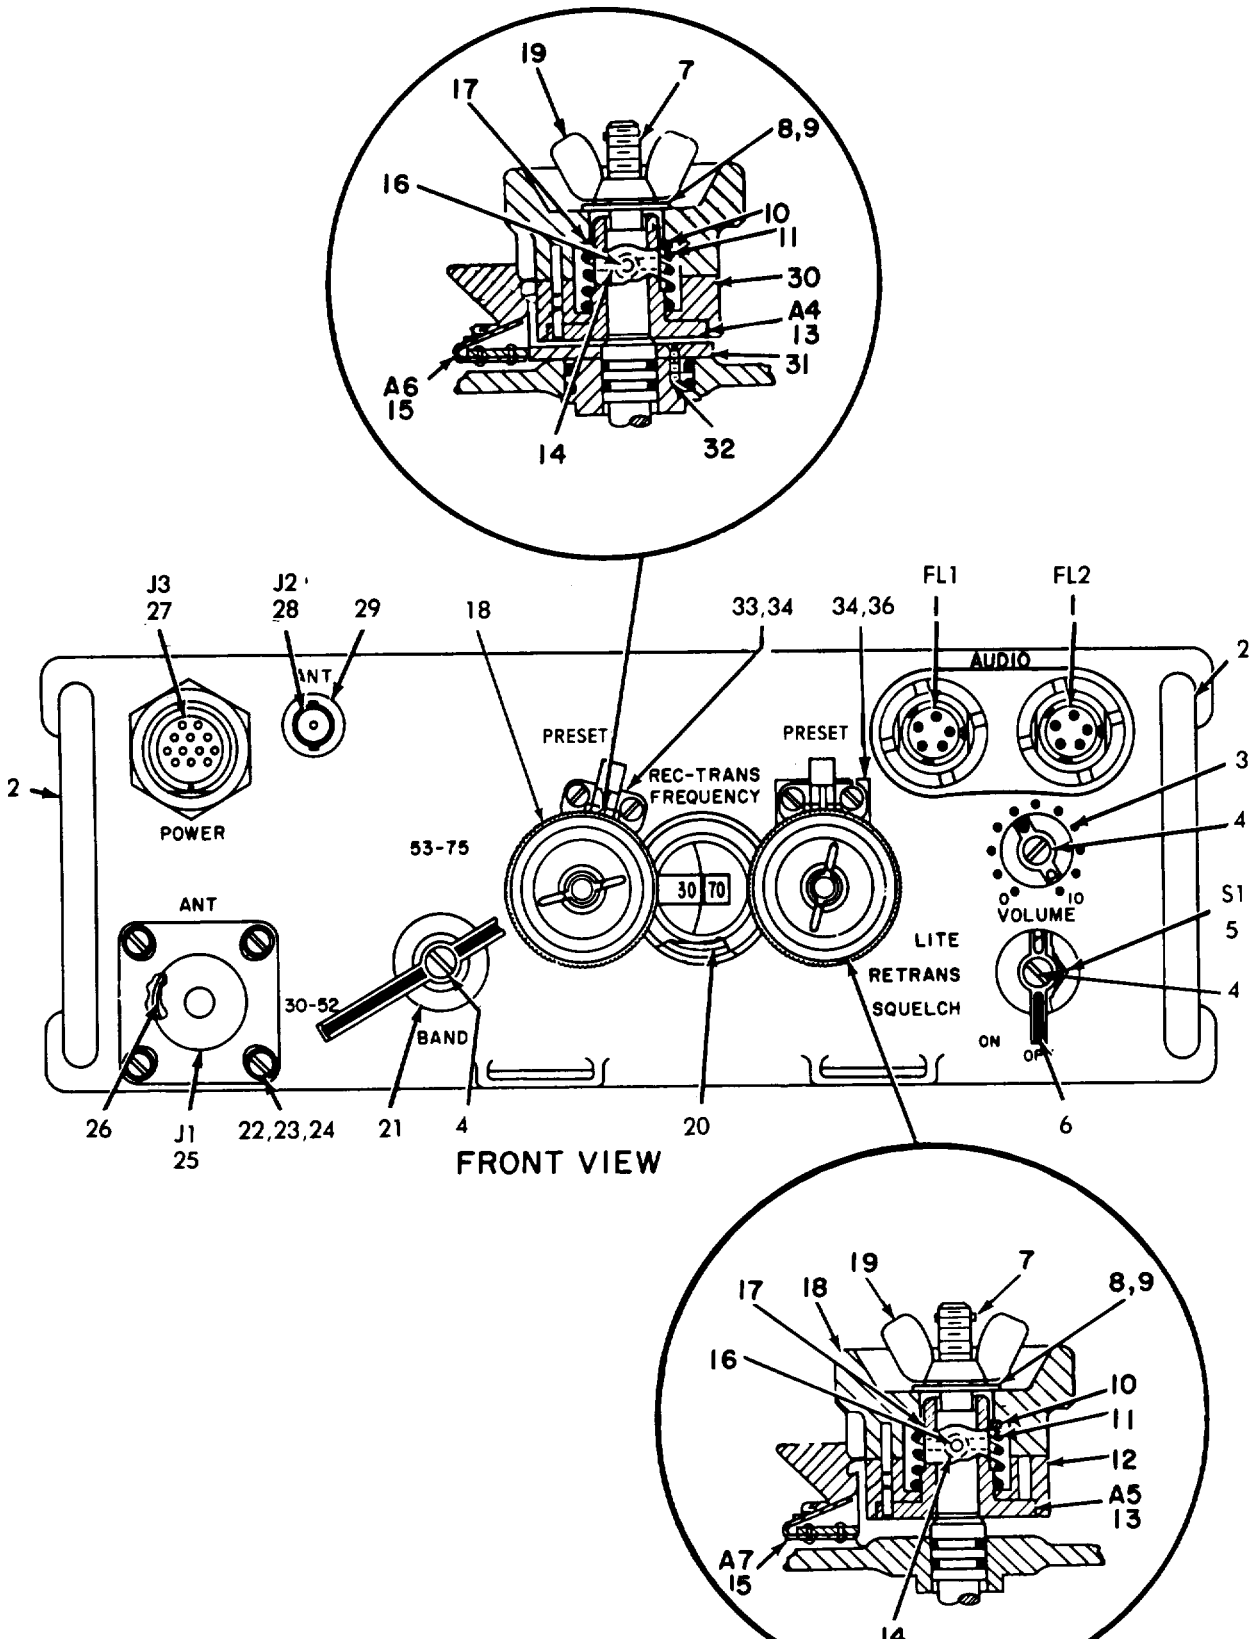

NOTE: FOR COMPLETE REFERENCE  
DESIGNATION PREFIX WITH A300.

ELOM1011

Figure 7. Front Panel Assembly (A300) (Includes Loading Network (A.28)) (Sheet 1 of 2).

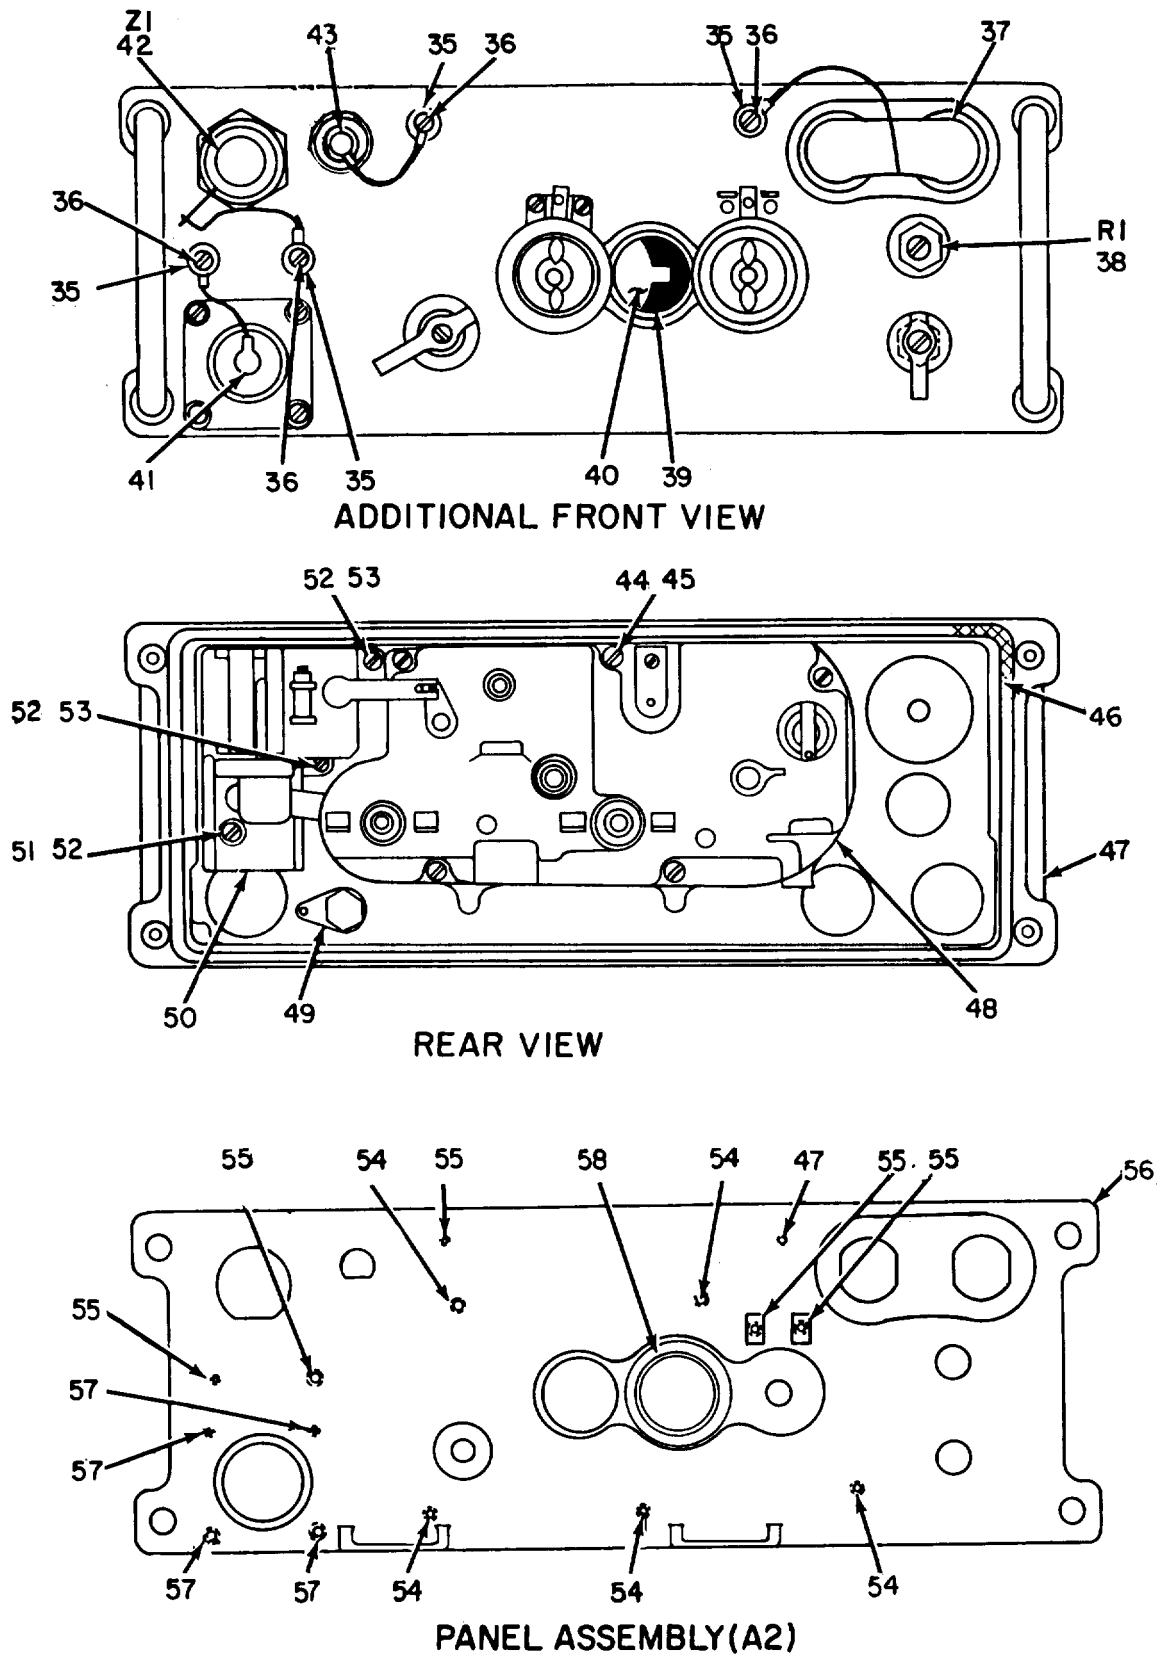

NOTE: FOR COMPLETE REFERENCE DESIGNATION  
PREFIX WITH A300.

ELOMI090

Figure 7. Front Panel Assembly (A300) (Includes Loading Network (A 28)) (Sheet 2 of 2).

(1) ITEM NO.	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UC)	(6) QTY
GROUP 0502 FRONT PANEL ASSEMBLY (A300) (INCLUDES LOADING NETWORK (A28))					

## FIGURE 7

3	PAOZZ	96906	MS91524-1	KNOB	1
4	PAOZZ	96906	MS51957-27	SCREW, MACHINE	3
6	PAOZZ	80063	SM-C-447052	KNOB	1
7	PAOZZ	80063	SM-B-447302-2	PIN, SPRING	2
8	PAOZZ	80063	SM-B-447694-1	WASHER, LOCK	2
9	PAOZZ	80063	SM-B-447107-5	SPACER, SPECIAL	2
10	PAOZZ	96906	MS16624-1037	RING, RETAINING	2
11	PAOZZ	80063	SM-B-447304	SPRING, HELICAL, COMP	2
12	PAOZZ	80063	SM-C-447976-1	KNOB	1
13	PAOZZ	80063	SM-C-447287	SLEEVE ASSEMBLY, TRA	2
14	PAOZZ	80063	SM-B-447302-3	PIN, SPRING	2
15	PAOZZ	80063	SM-C-447307	DIAL-KNOB LOCK, ELEC	2
16	PAOZZ	96906	MS51981-8	SETSCREW	2
17	PAOZZ	80063	SM-B-447303	WASHER, FLAT	2
18	PAOZZ	80063	SM-C-447306	KNOB	2
19	PAOZZ	80063	SM-B-447308	NUT, PLAIN, WING	2
21	PAOZZ	80063	SM-C-447226	KNOB	1
33	PAOZZ	80063	SM-B-447445-3	SCREW, MACHINE	2
34	PAOZZ	80063	SM-B-447694-3	WASHER, LOCK	4
35	PAOZZ	80063	SM-B-447392	BUSHING, SLEEVE	4
36	PAOZZ	80063	SM-B-447445-4	SCREW, MACHINE	6
37	PAOZZ	80063	SM-B-447440	CAP, PROTECTIVE, DUST	1
41	PAOZZ	80063	SM-B-447439	COVER, ELECTRICAL CO	1
42	PAOZZ	80058	U-317/U	CONNECTOR, PLUG, ELEC	1
43	PAOZZ	80063	SM-C-447403	COVER, ELECTRICAL CO	1
46	PAOZZ	80063	SM-B-447355	GASKET	1

END OF FIGURE



STOCK NUMBER	NATIONAL STOCK NUMBER INDEX		FIG.	ITEM
	FIG.	ITEM		
8465-00-001-6476	1	10		
8465-00-001-6477	1	9		
5965-00-043-3463	1	3		
5305-00-054-5647	7	36		
5305-00-054-6651	7	4		
5820-00-086-7138	1	2		
5985-00-086-7149	1	4		
5340-00-134-3493	6	3		
5340-00-236-0638	4	1		
5999-00-259-5009	2	1		
5820-00-295-7122	2	2		
4820-00-296-9677	6	5		
5340-00-497-9853	6	2		
5330-00-551-8250	3	78		
5355-00-552-0451	7	3		
5985-00-646-2365	1	6		
5365-00-715-1152	7	10		
5305-00-716-7833	7	16		
5315-00-823-8740	7	14		
5315-00-847-3735	7	7		
5310-00-889-2583	7	17		
5310-00-889-2586	7	8		
5305-00-889-3024	4	5		
5360-00-889-3299	7	11		
5355-00-889-3424	7	6		
5820-00-889-3803	1	5		
6135-00-926-8322	1	11		
9320-00-930-0724	6	6		
5355-00-930-0728	7	12		
5820-00-930-3725	1	1		
5355-00-951-5165	7	18		
5310-00-951-5660	7	34		
6140-00-952-1798	3	1		
3120-00-973-1508	7	35		
5820-00-973-1731	3	2		
5340-00-973-1732	7	37		
5935-00-973-1733	7	41		
5355-00-973-1734	7	15		
5935-00-973-1859	7	42		
5310-00-973-3697	7	19		
5330-00-973-3960	7	46		
5935-00-978-4357	7	43		
5305-00-984-4983	4	2		
	6	4		
6135-01-034-2239	1	11		
5330-01-049-0038	3	75		
8465-01-073-8326	1	8		
5820-01-099-9173	7	13		

FSCM	PART NUMBER	PART NUMBER INDEX		FIG.	ITEM
		STOCK NUMBER			
80058	AB-591/PRC-25	5985-00-086-7149		1	4
80058	AT-271A/PRC	5985-00-646-2365		1	6
80058	AT-892/PRC-25	5820-00-889-3803		1	5
80058	BA-5598/U	6135-01-034-2239		1	11
80058	BA4386PRC25	6135-00-926-8322		1	11
80058	H-250/U	5965-00-043-3463		1	3
81349	MIL-F-43834	8465-01-073-8326		1	8
		8465-00-001-6476		1	10
81349	MIL-S-43828	8465-00-001-6477		1	9
96906	MS16624-1037	5365-00-715-1152		7	10
96906	MS35206-226	5305-00-984-4983		4	2
				6	4
96906	MS51957-27	5305-00-054-6651		7	4
96906	MS51981-8	5305-00-716-7833		7	16
96906	MS9021-020	5330-00-551-8250		3	78
96906	MS91524-1	5355-00-552-0451		7	3
80058	RT-841/PRC-77	5820-00-930-3725		1	1
80063	SCB91329	5999-00-259-5009		2	1
80063	SM-B-180054	5330-01-049-0038		3	75
80063	SM-B-182386	5820-00-295-7122		2	2
80063	SM-B-447107-5			7	9
80063	SM-B-447224	5305-00-889-3024		4	5
80063	SM-B-447265	5340-00-497-9853		6	2
80063	SM-B-447302-2	5315-00-847-3735		7	7
80063	SM-B-447302-3	5315-00-823-8740		7	14
80063	SM-B-447303	5310-00-889-2583		7	17
80063	SM-B-447304	5360-00-889-3299		7	11
80063	SM-B-447308	5310-00-973-3697		7	19
80063	SM-B-447320	9320-00-930-0724		6	6
80063	SM-B-447355	5330-00-973-3960		7	46
80063	SM-B-447392	3120-00-973-1508		7	35
80063	SM-B-447439	5935-00-973-1733		7	41
80063	SM-B-447440	5340-00-973-1732		7	37
80063	SM-B-447445-3			7	33
80063	SM-B-447445-4	5305-00-054-5647		7	36
80063	SM-B-447694-1	5310-00-889-2586		7	8
80063	SM-B-447694-2			4	6
80063	SM-B-447694-3	5310-00-951-5660		7	34
80063	SM-C-447052	5355-00-889-3424		7	6
80063	SM-C-447163	5820-00-086-7138		1	2
80063	SM-C-447226			7	21
80063	SM-C-447287	5820-01-099-9173		7	13
80063	SM-C-447306	5355-00-951-5165		7	18
80063	SM-C-447307	5355-00-973-1734		7	15
80063	SM-C-447321-1	5340-00-236-0638		4	1
80063	SM-C-447321-2	5340-00-134-3493		6	3
80063	SM-C-447403	5935-00-978-4357		7	43
80063	SM-C-447976-1	5355-00-930-0728		7	12
80063	SM-D-447322-1	4820-00-296-9677		6	5
80063	SM-D-447351	5820-00-973-1731		3	2
80063	SMD447322	6140-00-952-1798		3	1



FSCM	PART NUMBER	PART NUMBER INDEX		FIG.	ITEM
		STOCK NUMBER			
80058	ST-138/PRC-25			1	7
80058	U-317/U	5935-00-973-1859		7	42

FIG.	ITEM	STOCK NUMBER	FIGURE AND ITEM NUMBER INDEX	
			FSCM	PART NUMBER
1	1	5820-00-930-3725	80058	RT-841/PRC-77
1	2	5820-00-086-7138	80063	SM-C-447163
1	3	5965-00-043-3463	80058	H-250/U
1	4	5985-00-086-7149	80058	AB-591/PRC-25
1	5	5820-00-889-3803	80058	AT-892/PRC-25
1	6	5985-00-646-2365	80058	AT-271A/PRC
1	7		80058	ST-138/PRC-25
1	8	8465-01-073-8326	81349	MIL-F-43834
1	9	8465-00-001-6477	81349	MIL-S-43828
1	10	8465-00-001-6476	81349	MIL-F-43834
1	11	6135-00-926-8322	80058	BA4386PRC25
1	11	6135-01-034-2239	80058	BA-5598/U
2	1	5999-00-259-5009	80063	SCB91329
2	2	5820-00-295-7122	80063	SM-B-182386
3	1	6140-00-952-1798	80063	SMD447322
3	2	5820-00-973-1731	80063	SM-D-447351
3	75	5330-01-049-0038	80063	SM-B-180054
3	78	5330-00-551-8250	96906	MS9021-020
4	1	5340-00-236-0638	80063	SM-C-447321-1
4	2	5305-00-984-4983	96906	MS35206-226
4	5	5305-00-889-3024	80063	SM-B-447224
4	6		80063	SM-B-447694-2
6	2	5340-00-497-9853	80063	SM-B-447265
6	3	5340-00-134-3493	80063	SM-C-447321-2
6	4	5305-00-984-4983	96906	MS35206-226
6	5	4820-00-296-9677	80063	SM-D-447322-1
6	6	9320-00-930-0724	80063	SM-B-447320
7	3	5355-00-552-0451	96906	MS91524-1
7	4	5305-00-054-6651	96906	MS51957-27
7	6	5355-00-889-3424	80063	SM-C-447052
7	7	5315-00-847-3735	80063	SM-B-447302-2
7	8	5310-00-889-2586	80063	SM-B-447694-1
7	9		80063	SM-B-447107-5
7	10	5365-00-715-1152	96906	MS16624-1037
7	11	5360-00-889-3299	80063	SM-B-447304
7	12	5355-00-930-0728	80063	SM-C-447976-1
7	13	5820-01-099-9173	80063	SM-C-447287
7	14	5315-00-823-8740	80063	SM-B-447302-3
7	15	5355-00-973-1734	80063	SM-C-447307
7	16	5305-00-716-7833	96906	MS51981-8
7	17	5310-00-889-2583	80063	SM-B-447303
7	18	5355-00-951-5165	80063	SM-C-447306
7	19	5310-00-973-3697	80063	SM-B-447308
7	21		80063	SM-C-447226
7	33		80063	SM-B-447445-3
7	34	5310-00-951-5660	80063	SM-B-447694-3
7	35	3120-00-973-1508	80063	SM-B-447392
7	36	5305-00-054-5647	80063	SM-B-447445-4
7	37	5340-00-973-1732	80063	SM-B-447440
7	41	5935-00-973-1733	80063	SM-B-447439
7	42	5935-00-973-1859	80058	U-317/U

FIG.	ITEM	STOCK NUMBER	FIGURE AND ITEM NUMBER INDEXES	
			FSCM	PART NUMBER
7	43	5935-00-978-4357	80063	SM-C-447403
7	46	5330-00-973-3960	80063	SM-B-447355



RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN, JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM (PRINT YOUR UNIT'S COMPLETE ADDRESS)  
 Commander  
 Stateside Army Depot  
 ATTN: AMSTA-US  
 Stateside, N.J. 07703-5007

DATE SENT  
 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.  
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).  
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.  
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER  
 SSG I. M. DeSpirit of 999-1776

SIGN HERE

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

**SAMPLE**

Commander  
US Army Communications-Electronics Command  
and Fort Monmouth  
ATTN: AMSEL-LC-ME-PS  
Fort Monmouth, New Jersey 07703-5000

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER  
TM 11-5820-677-20P

PUBLICATION DATE  
15 August 89

PUBLICATION TITLE  
Radio Set AN/PRC-77

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander  
US Army Communications-Electronics Command  
and Fort Monmouth  
ATTN: AMSEL-LC-ME-PS  
Fort Monmouth, New Jersey 07703-5000

TEAR ALONG PERFORATED LINE



RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER  
TM 11-5820-677-20P

PUBLICATION DATE  
15 August 89

PUBLICATION TITLE  
Radio Set AN/PRC-77

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

Empty space for providing details of the error and recommended corrections.

TEAR ALONG PERFORATED LINE

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

\_\_\_\_\_  
\_\_\_\_\_

OFFICIAL BUSINESS

Commander  
US Army Communications-Electronics Command  
and Fort Monmouth  
ATTN: AMSEL-LC-ME-PS  
Fort Monmouth, New Jersey 07703-5000

TEAR ALONG PERFORATED LINE



FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander  
US Army Communications-Electronics Command  
and Fort Monmouth  
ATTN: AMSEL-LC-ME-PS  
Fort Monmouth, New Jersey 07703-5000

TEAR ALONG PERFORATED LINE

By Order of the Secretaries of the Army, the Navy and the Air Force:

Official:

CARL E. VUONO  
*General, United States Army*  
*Chief of Staff*

WILLIAM J. MEEHAN II  
*Brigadier General, United States Army*  
*The Adjutant General*

JOHN C. WEAVER  
*Rear Admiral, United States Navy*  
*Commander, Space and Naval Warfare*  
*Systems Command*

Official:

WILLIAM O. NATIONS  
*Colonel, USAF*  
*Director of Information*  
*Management and Administration*

LARRY D. WELSH  
*General, USAF*  
*Chief of Staff*

DISTRIBUTION :

To be distributed in accordance with DA Form 12-51 unit requirements  
for AN/ PRC-77.





